





#### **Features & Benefits**

- For spot and downlight designs from 4,200 to 12,800 lumen
- Thermal resistance range Rth 0.46°C/W
- Modular design with mounting holes foreseen for a wide range of LED modules and COB's:
  - Zhaga Book 3 Spot Light Modules Edison Edilex SLM, Osram PrevaLED Core Z3 / Z4, Philips Fortimo SLM, Sharp INTERMO, Tridonic Talexx Stark SLE G3 / G4, Vossloh Schwabe Luga Shop, ...
  - Bridgelux ESR, Vero & Décor Vero 13/18/29, V-series LED arrays
  - Cree XLamp CXA15, CXB15, CXA18, CXB18, CXA25, CXB25, CXA30, CXB30
  - Edison EdiPower II HM / HR / SD series
  - GE Infusion M series, DLM series, NPM series
  - Lumileds Luxeon COB's 1208, 1211, 1216
  - Lustrous LUSTRON 5 series XL5, LUSTRON 6 series LL613F, LL620F, LL660D
  - Osram Soleriq P9, P13, S19, E30, E45
  - Prolight Opto PACF, PACG, PABA, PACD
  - Sharp Mega Zenigata, Tiger Zenigata
- Diameter 99mm Height 55mm Other heights on request
- High lifetime design > 60Khrs (L 10 life time @40°C)
- Warranty 5 years



### **Order Information**

































**Example : IceLED Xtra 550** 

IceLED Xtra 1



lceLED Xtra is designed in this way that you can mount LED modules from various manufacturers on the same LED cooler

Simple mounting with self tapping screws Recommened screw force 6lb/in

Screws are avaliable from MechaTronix









#### **Product Details**



<sup>\*1 3</sup>D files are avaliable in ParaSolid, STP and IGS on request

To calculate the dissipated power please use the following formula:  $Pd = Pe \times (1-\eta L)$ 

Pd - Dissipated power

Pe - Electrical power

 $\eta L$  = Light effciency of the LED module

#### **Notes:**

- MechaTronix reserves the right to change products or specifications without prior notice.
- Mentioned models are an extraction of full product range.
- For specific mechanical adaptations please contact MechaTronix.



<sup>\*2</sup> The fan requires a constant voltage power source of 12Vdc, 50mA

<sup>\*3</sup> The thermal resistance Rth is determined with a calibrated heat source of 30mm x 30mm central placed on the heat sink, Tamb 40° and an open environment. Reference data @ heat sink to ambient temperature rise Ths-amb 50°C

The thermal resistance of a LED cooler is not a fix value and will vary with the applied dissipated power Pd

<sup>\*4</sup> Dissipated power Pd. Reference data @ heat sink to ambient temperature rise Ths-amb 50°C

The maximal dissipated power needs to be verified in function of required case temperature Tc or junction temperature Tj and related to the estimated ambient temperature where the light fixture will be placed

Please be aware the dissipated power Pd is not the same as the electrical power Pe of a LED module







## **Mounting Options**

The IceLED Xtra modular active LED cooler is standard foreseen from a variety of mounting holes which allow direct mounting of LED engines, COB's and secondary optics on the LED heat sink.

In this way mechanical afterwork and related costs can be avoided, and lighting designers can standardize their designs on a limited number of LED coolers.

Below you find an overview of LED modules and COB's which standard fit on the IceLED Xtra LED cooler.

The IceLED Xtra is probably the most complete standard LED cooler with regards to mounting possibilities of Zhaga and the latest generation of COB LED modules.

For more details about the required mounting holes and thermal results for your specific LED brand and model, please refer to the brand LED cooler datasheets under "Brand Products" and the brand LED cooler overview under the "Download" menu.

### Zhaga



The Zhaga Consortium is developing specifications that enable the interchangeability of LED light sources made by multiple different manufactures. The Zhaga specifications, known as Books, describe the interfaces between LED luminaires and LED light engines. Zhaga's members include hundreds of companies from throughout the global lighting industry. The cooperation is governed by a consortium agreement that defines rules regarding confidentiality, intellectual property and decision making.

#### Mounting indicator marks overview

MechaTronix recommends the use of a high thermal conductive interface between the LED module and the LED cooler. Either thermal grease, a thermal pad or a phase change thermal pad thickness 0.1-0.15mm is recommended. Thermal pads or phase change thermal pads can be preapplied from MechaTronix.



#### **Zhaga Book 2 socketable LED engines**

Zhaga Interface Specification Book 2 defines the interfaces of a socketable, circular LED light engine (LLE) with an integrated LED driver (electronic control gear).

The LLE has a round drum shape with maximum dimensions of 70.2 mm diameter and 45 mm height. It has a circular light-emitting surface with a typical diameter of 59 mm, and a PHJ65d type base. Zhaga Book 2 LED modules are mounted by 3 M3 screws evenly located on diameter of 79.5mm on the LED cooler.

Book 2 is similar to Book 8, except that the LLEs described in Book 2 have smaller dimensions.

Book 2 LLEs are intended primarily (but not exclusively) for use in LED luminaires for downlighting applications.



- Megaman Teco
- Philips Fortimo TDLM
- Tridonic Talexx Stark DLE twist

#### **Mounting**

- Direct mounting of the LED holder PHJ65d with 3 M3 self tapping screws
- Mounting of the LED engine by twist and lock operation
- Yellow indicator marks



\*1 This is a non-binding overview of available Zhaga Book 2 LED modules at press









## **Mounting Options**



Zhaga Interface Specification Book 3 defines the interfaces of a type-D LED light engine (non-socketable LED module with separate electronic control gear). The LED light engine LLE has a round disc shape with a maxium height of 7.2 mm and a typical diameter of 50 mm. It is suitable for spot-lighting and other applications that benefit from a small, circular source. Book 3 specifies a circular light-emitting surface (LES) that can have a range of diameters, namely 9 mm, 13.5 mm, 19 mm and 23 mm.





#### Zhaga book 3 compliant LED Spot Light modules \*1

- Edison Edilex SLM
- Osram PrevaLED CORE
- Philips Fortimo SLM
- Sharp INTERMO
- Tridonic Talexx Stark SLE
- Vexica Lumaera
- Vossloh Schwabe Luga Shop
- \*1 This is a non-binding overview of available Zhaga book 3 LED modules at press

# Zhaga Book 3 mounting through the use of LED holders and connectors

With the use of Zhaga Book 3 mechanical compatible LED holders, a wide variety of LED COB's can be mounted in the same way on these LED coolers.

Zhaga Book 3 compatiable LED holders can be found from BJB, TE Connectivity (Tyco), Molex and Ideal Industries.



#### LED COB's for which Zhaga book 3 LED holders are available

- Bridgelux V15, V18, ES rectangular LED array
- Citizen CitiLED CLL032, CLU034, CLL042, CLU044
- Cree XLamp CXA18xx, CXA25xx, CXA30xx
- Edison Opto HM16, HM30, HM40
- Lextar Nimbus 2000, 3000
- LG Innotek LEMWM18 (10W, 13W, 17W, 24W), LEMWM28 (40W)
- Lustrous Lustron LL613F, LL620F, LL630F, LL630D, LL660D
- Nichia J216, J360, L110, L121, L204
- Osram Solerig P13, S13, S19, E30
- Lumileds Luxeon 1203, 1204, 1205, 1208, 1211 and 1216
   Luxeon K12 and K16
- Prolight Opto PABA, PACC, PACD, PACF, PACG
- Samsung LC026, LC040
- Seoul Semiconductor ZC12, ZC18, ZC25, ZC40, ZC60
- Sharp Mega Zenigata and Tiger Zenigata
- Tridonic Talexx Stark SLE Gen3 Mini LES 17

#### Mounting

 Direct mounting with 2 M3 self tapping screws
 Green indicator marks

#### Reflector ring Mounting

- This optional ring can be mounted on top of the Edison Opto EdiLex spot light module and provides in this way an easy plug-and-play attachment of various reflectors.
- Mounting with 3 self tapping screws M3 x 10mm
   Red indicator marks









## **Mounting Options**



#### Zhaga Book 5 socketable LED engines

Zhaga Interface Specification Book 5 defines the interfaces of LED light engines (LLEs) comprising a socketable, circular LED module with a separate LED driver (electronic control gear).

The circular LED modules in Book 5 have maximum dimensions of 70 mm diameter and 21 mm height. Zhaga Book 5 LED modules are mounted by 4 M4 screws on diameter of 58.42mm on the LED cooler (NOT evenly located). Book 5 allows optical accessories with defined widths of up to 180 mm and heights up to 180 mm.

Book 5 LED modules have typical light-emitting surface (LES) diameters ranging from 13.5 mm to 26 mm. Book 5 LLEs are primarily intended for use in down-lighting or spot-lighting luminaires.

#### Zhaga Book 5 compliant LED engines \*1

- GE Infusion LED M-series Spot Light Modules
- GE Infusion LED DLM-series Down Light Modules
- GE Infusion LED NPM-series Narrow Punch Modules
- \*1 This is a non-binding overview of avaliable Zhaga Book 5 LED modules at press.


#### **Mounting**

 Direct mounting of the LED collar with 4 M4 self tapping screws

Mounting of the LED engine by twist and lock operation

Blue indicator marks

#### **Zhaga Book 6 socketable LED engines**



The LLE has nominal dimensions of 90 mm diameter and 42 mm height, and has a GH76p base. Zhaga Book 6 LED modules are mounted by 3 M3 screws evenly located on diameter of 79.5mm on the LED cooler.

The socketable Book 6 LLE fits into a holder, which has a diameter that does not exceed the diameter of the LLE itself. This enables compact luminaire designs.

Book 6 LLEs are applicable for downlights, pendant luminaires, and wall-mounted and recessed luminaries.



- Toshiba E-Core LED Light Engine LED LEV11 and LEV16
- \*1 This is a non-binding overview of avaliable Zhaga Book 6 LED modules at press.

#### **Mounting**

 Direct mounting of the LED holder GH76p with 3 M3 self tapping screws

Mounting of the LED engine by twist and lock operation

Yellow indicator marks












# **Mounting Options**



**Zhaga Book 11 Spot Light Modules** 



Book 11 LLEs are suitable for spot-lighting and other applications that benefit from a small, circular source.





#### LED COB's for which Zhaga book 11 LED holders are available Mounting

- Bridgelux V10 / V13
- Citizen CitiLED CLL022, CLU024
- Cree XLamp CXA13xx, CXA15xx
- Edison Opto HM05, HM09
- Lextar Nimbus 1500
- Osram Soleriq P6, P9, P13, S13
- Prolight Opto PACB, PACE
- Seoul Semiconductor ZC6
- Sharp Mini Zenigata
- Tridonic Talexx Stark SLE Gen3 Mini LES 10

• Direct mounting with 2 M3 self tapping screws Orange indicator marks









## **Mounting Options**


### **Bridgelux LED Arrays**



Bridgelux is a leading provider of high power, cost effective and energy efficient light emitting diode (LED) solutions. Leveraging patented light source technology, Bridgelux LED Arrays replace traditional technologies (such as incandescent, halogen, fluorescent and high intensity discharge lighting) with integrated solid state light sources enabling high performance and energy-efficient products for the general lighting market.

#### Mounting indicator marks overview

MechaTronix recommends the use of a high thermal conductive interface between the LED module and the LED cooler. Either thermal grease, a thermal pad or a phase change thermal pad thickness 0.1-0.15mm is recommended. Thermal pads or phase change thermal pads can be preapplied from MechaTronix.





### Bridgelux Vero 13 / Vero 18 LED Array

#### **Model names**

- Vero 13 BXRC-27x2000
- Vero 13 BXRC-30x2000
- Vero 13 BXRC-35E2000
- Vero 13 BXRC-40x2000
- Vero 13 BXRC-50x2000
- Vero 18 BXRC-27x4000
- Vero 18 BXRC-30x4000
- Vero 18 BXRC-35E4000
- Vero 18 BXRC-40E4000
   Vero 18 BXRC-50C4000

#### Mounting

 Direct mounting with 2 self tapping screws M3 x 6mm Red indicator marks







#### **Model names**

- Vero 29 BXRC-27x10K0
- Vero 29 BXRC-30x10K0
- Vero 29 BXRC-35E10K0
- Vero 29 BXRC-40E10K0
- Vero 29 BXRC-50C10K0

#### **Mounting**

• Direct mounting with 4 self tapping screws M3 x 6mm Blue indicator marks



#### Bridgelux Décor Vero 13 / Vero 18 LED Array

#### **Model names**

- BXRC-xxA2001-C-23
- BXRC-xxH2000-C-xx
- BXRC-xxA4001-F-23
- BXRC-xxH4000-F-xx
- BXRC-xxE4000-F-04BXRC-56G4000-F-04

#### Mounting

• Direct mounting with 2 screws M3 x 6mm Red indicator marks











### **Mounting Options**





#### Bridgelux Décor Vero 29 LED Array

#### **Model names**

- BXRC-xxA10K1-L-23
- BXRC-56G10K0-L-04

#### **Mounting**

• Direct mounting with 4 screws M3 x 6mm Blue indicator marks





#### Bridgelux V series V 15 / V 18 LED Array

#### **Model names**

- V15 BXRE-xxx3001-D-xx
- V18 BXRE-xxx4000-F-xx

#### Mounting

 With Zhaga Book 3 LED holder BJB spotlight connector 47.319.2224 Mounting with 2 screws M3 x 10mm Green indicator marks





#### **Bridgelux ES Rectangle LED Array**

#### **Model names**

- BXRA-xxx0800
- BXRA-xxx1200
- BXRA-xxx2000
- BXRA-40E0950
- BXRA-40E1350
- BXRA-40E2200
- BXRA-xxC1100
- BXRA-xxC1600
- BXRA-xxC2600

#### Mounting

With Zhaga Book 3 LED holder
 BJB spotlight connector 47.319.2040
 Mounting with 2 self tapping screws M3 x 6mm
 Green indicator marks









## **Mounting Options**

### **Cree XLamp LED Array**



Cree XLamp® LEDs deliver the industry's best lighting-class performance and are application-optimized to enable the lowest system cost.

Cree's new CXA LED Arrays deliver high lumen output and efficacy in a family of single, easy-to-use components. Optimized to simplify designs and lower system cost, Cree's CXA LED arrays are available in system level performance from 300 to over 16,000 lumens and can enable applications ranging from GU10s and commercial downlights to outdoor area lighting and high-bay lighting.

#### Mounting indicator marks overview

MechaTronix recommends the use of a high thermal conductive interface between the LED module and the LED cooler. Either thermal grease, a thermal pad or a phase change thermal pad thickness 0.1-0.15mm is recommended. Thermal pads or phase change thermal pads can be preapplied from MechaTronix.







### Cree XLamp CXA15 / CXB15 LED Array

#### **Model names**

- CXA1512-xxxx
- CXB1512-xxxx
- CXA1520-xxxx

#### **Mounting**

• With Zhaga Book 11 LED holder BJB Spotlight connector 47.319.6101 Ideal Industries Chip-Lok™ holder 50-2001CR Mounting with 2 self tapping screws M3 x 10mm Orange indicator marks





#### Cree XLamp CXA18 / CXB18 LED Array

#### **Model names**

- CXA1816-xxxx
- CXB1816-xxxx
- CXA1820-xxxx
- CXB1820-xxxx
- CXA1830-xxxx
- CXB1830-xxxx
- CXA1850-xxxx

#### Mounting

- With Zhaga Book 3 LED holder
  - BJB Spotlight connector 47.319.2131 (CXA1830 excluded)

Ideal Industries Chip-Lok™ holder 50-2101CR

TE Connectivity Lumawise type Z50 2213401-1

TE Connectivity Lumawise type Z50 2213401-2

Mounting with 2 self tapping screws M3 x 10mm

**Green indicator marks** 

#### Cree XLamp CXA25 / CXB25 LED Array





#### **Model names**

- CXA2520-xxxx
- CXA2530-xxxx
- CXB2530-xxxx
- CXA2540-xxxx
- CXB2540-xxxx
- CXA2590-xxxx

#### Mounting

• With Zhaga Book 3 LED holder BJB Spotlight connector 47.319.2141 Ideal Industries Chip-Lok™ holder 50-2102CR TE Connectivity Lumawise type Z50 2213407-1

TE Connectivity Lumawise type Z50 2213407-2

Mounting with 2 self tapping screws M3 x 10mm

**Green indicator marks** 









## **Mounting Options**



#### Cree XLamp CXA30 / CXB30 LED Array

#### **Model names**

- CXA3050-xxxx
- CXB3050-xxxx
- CXA3070-xxxx
- CXB3070-xxxx

#### **Mounting**

• With Zhaga Book 3 LED holder

BJB Spotlight connector 47.319.2151

Ideal Industries Chip-Lok™ holder 50-2234C

Mounting with 2 self tapping screws M3 x 10mm

Green indicator marks

### **Edison Opto LED Modules and COB's**



Edison Opto with headquarters in Chung-Ho Dist, New Taipei City, Taiwan is a professional LED manufacture with specializes in designing and producing Highpower LEDs, solid state lighting applications, LED sensors and SPDIFs. In response to rapid growth of capacity demand, Edison Opto has established factories in Dongguan and Yangzhou China and subsidiaries in USA and Germany. Edison Opto COB LED modules outstand in light quality and are available in the broadest lumen and CRI range available on the market.

#### Mounting indicator marks overview

MechaTronix recommends the use of a high thermal conductive interface between the LED module and the LED cooler. Either thermal grease, a thermal pad or a phase change thermal pad thickness 0.1-0.15mm is recommended. Thermal pads or phase change thermal pads can be preapplied from MechaTronix.






#### Edison Opto Edipower II HM

#### **Model Names 30W**

• 2PHM30xxxx

#### Mounting

• With Zhaga Book 3 LED holder
BJB Spotlight connector 47.319.2021
Ideal Industries Chip-Lok™ holder 50-2103CT
TE Connectivity Lumawise type Z50 2213254-1
TE Connectivity Lumawise type Z50 2213254-2
Mounting with 2 self tapping screws M3 x 8mm
Green indicator marks



#### Mounting

With Zhaga Book 3 LED holder
 BJB spotlight connector 47.319.2030

 Ideal Industries Chip-Lok™ holder 50-2204CT
 Mounting with 2 self tapping screws M3 x 8mm
 Green indicator marks











# **Mounting Options**





#### **Edison Opto EdiPower II HR / SD**

#### **Model names**

- 2PHR35xxxx
- 2PSD40xxxx
- 2PSD50xxxx

#### **Mounting**

- Direct mounting with 2 self tapping screws M3 x 6mm side holes Green indicator marks
- Direct mounting with 2 self tapping screws M3 x 6mm corner holes Blue indicator marks





#### **Edison Opto EdiLex Spot Light Module (SLM)**

#### **Model names**

- 5PHR22xxxx
- 5PHV35xxxx

#### **Mountin**

 Direct mounting with 2 self tapping screws M3 x 10mm Green indicator marks









## **Mounting Options**

### **GE Lighting LED Modules**



Lighting

GE Infusion™ is a game-changing technology and one of the most flexible LED lighting solutions on the market. As a designer, OEM or end-users, you can choose from an extensive selection of modules. Plus, there's the assurance of GE reliability and performance.

#### Mounting indicator marks overview

MechaTronix recommends the use of a high thermal conductive interface between the LED module and the LED cooler. Either thermal grease. a thermal pad or a phase change thermal pad thickness 0.1-0.15mm is recommended. Thermal pads or phase change thermal pads can be preapplied from MechaTronix.





# **Infusion M-series Spot Light Modules**

#### **Model names**

- Infusion M2000 series • Infusion M3000 series
- Infusion M4500 series

#### Mounting

- Twist and lock LED engine
- Mounting with GE LED collar by 4 self tapping screws M4 x 6mm or 8mm **Red indicator marks**





#### **Infusion DLM-series Down Light Modules**

#### **Model names**

- Infusion DLM2000 series
- Infusion DLM3000 series
- Infusion DLM4000 series

#### **Mounting**

- Twist and lock LED engine
- Mounting with GE LED collar by 4 self tapping screws M4 x 6mm or 8mm **Red indicator marks**





#### **Infusion NPM-series Narrow Punch Modules**

#### **Model names**

- MP30/827/W/N
- MP30/830/W/N
- MP30/930/W/N
- MP30/840/W/N

#### Mounting

- Twist and lock LED engine
- Mounting with GE LED collar by 4 self tapping screws M4 x 6mm or 8mm **Red indicator marks**









# **Mounting Options**


### **Lumileds LED Array & COB**



Lumileds LUXEON COB is a new breakthrough in efficacy for arrays. Due to its industry leading small Light Emitting Surfaces (LES), the COB array is very easy work with and will enable easier and less expensive designs. All LUXEON COBs are available in a single 3-step as well as a single 5-step MacAdam Ellipse, ensuring uniform optical performance in the application. Ideal applications include down lights and directional lamps.

#### Mounting indicator marks overview

MechaTronix recommends the use of a high thermal conductive interface between the LED module and the LED cooler. Either thermal grease, a thermal pad or a phase change thermal pad thickness 0.1-0.15mm is recommended. Thermal pads or phase change thermal pads can be preapplied from MechaTronix.







#### **Luxeon COB 1208**

#### **Model names**

• Luxeon COB LHC1-xxxx-1208

#### **Mounting**

- Direct mounting with 2 self tapping screws M3 x 6mm **Red indicator marks**
- With Zhaga Book 3 LED holder BJB spotlight connector 47.319.2011 Ideal Industries Chip-Lok™ holder 50-2100SH TE Connectivity Lumawise type Z50 2213130-1 TE Connectivity Lumawise type Z50 2213130-2 Mounting with 2 self tapping screws M3 x 8mm **Green indicator marks**





#### **Luxeon COB 1211**

#### **Model names**

• Luxeon COB LHC1-xxxx-1211

#### Mounting

• With Zhaga Book 3 LED holder BJB spotlight connector 47.319.2030 Ideal Industries Chip-Lok™ holder 50-2204CT Mounting with 2 self tapping screws M3 x 8mm **Green indicator marks** 





#### **Luxeon COB 1216**

#### **Model names**

• Luxeon COB LHC1-xxxx-1216

#### **Mounting**

• With Zhaga Book 3 LED holder BJB spotlight connector 47.319.2030 Ideal Industries Chip-Lok™ holder 50-2204CT Mounting with 2 screws M3 x 10mm **Green indicator marks** 









## **Mounting Options**


#### **Lustrous LED COB**

# LUSTROUS Green Technology of Lighting

LUSTROUS unique Chip-on-Board (COB) packaging technology of High Power LED leads the core competence of LUSTROUS. COB packaging technology shows excellent thermal management and high efficiency performance. One of the benefits of COB is bright, uniform light output. The excellent low thermal resistance is achieved through state of the art COB technology on highly conductive substrates. This enables low junction temperatures at chip level for much higher efficiencies.

#### Mounting indicator marks overview

MechaTronix recommends the use of a high thermal conductive interface between the LED module and the LED cooler. Either thermal grease, a thermal pad or a phase change thermal pad thickness 0.1-0.15mm is recommended. Thermal pads or phase change thermal pads can be preapplied from MechaTronix.





### **Lustrous Lustron XL5 LED COB**

#### **Model names**

Lustron XL5 L540xxx

• Direct mounting with 4 self tapping screws M2.5 x 6mm **Red indicator marks** 






#### Lustrous Lustron LL613F - LL620F LED COB

#### **Model names**

- Lustron LL613F1206-xxx
- Lustron LL620F1208-xxx

#### **Mounting**

• With Zhaga Book 3 LED holder BJB spotlight connector 47.319.2021 Ideal Industries Chip-Lok™ holder 50-2103CT Mounting with 2 self tapping screws M3 x 8mm **Green indicator marks** 





#### Lustrous Lustron LL630F - LL660D LED COB

#### **Model names**

- Lustron LL630F1210-xxx
- Lustron LL660D1210-xxx

#### Mounting

• With Zhaga Book 3 LED holder BJB spotlight connector 47.319.2030 Ideal Industries Chip-Lok™ holder 50-2204CT Mounting with 2 self tapping screws M3 x 8mm **Green indicator marks** 









# **Mounting Options**


### **Osram PrevaLED LED Modules**



With the PrevaLED Core and PrevaLED Core AC, Osram leads the path of versatile LED light modules interchangeable according Zhaga book 3 specifications. With an initial color binning below 3 steps Mc Adam, a wide range of lumen packages from 1.100lm all the way up to 5.000lm and a broad availability of color temperatures, the Osram PrevaLED Core found it's strive in high-end shop and down light applications with an uncompromised lighting quality.

#### Mounting indicator marks overview

MechaTronix recommends the use of a high thermal conductive interface between the LED module and the LED cooler. Either thermal grease, a thermal pad or a phase change thermal pad thickness 0.1-0.15mm is recommended. Thermal pads or phase change thermal pads can be pre-ap







#### **Osram PrevaLED Core Z3**

#### **Model names**

• PL-CORE-5000-xxx-Z3

#### **Mounting**

• Direct mounting with 2 self tapping screws M3 x 10mm Green indicator marks





#### Osram PrevaLED Core Z4

#### **Model names**

• PL-CORE-Z4-5000-xxx

#### Mounting

• Direct mounting with 2 screws M3 x 10mm Green indicator marks









## **Mounting Options**

### **Osram Opto Semiconductors LED COB**

# **OSRAM**

Opto Semiconductors

Osram SOLERIQ © LEDs are designed to meet the requirements of professional indoor general lighting applications. Large flux output, small light emitting surfaces, variation, CRI greater than 80 and easy to use Chip-on-Board technology support easy and creative lighting design. These properties make SOLERIQ ® LED COB modules a high efficient, high-quality and price-performance-optimized solution for all demanding and at the same time cost-conscious lighting manufactures and designers.

#### Mounting indicator marks overview

MechaTronix recommends the use of a high thermal conductive interface between the LED module and the LED cooler. Either thermal grease, a thermal pad or a phase change thermal pad thickness 0.1-0.15mm is recommended. Thermal pads or phase change thermal pads can be preapplied from MechaTronix.







#### Osram Soleriq P9 LED COB

#### **Model names**

- GW MAFJB1.EM
- GW MAFJB1.CM

#### **Mounting**

 With Zhaga Book 11 LED holder BJB Spotlight connector 47.319.6200 Mounting with 2 screws M3 x 8mm Orange indicator marks





#### **Osram Soleriq P13 LED COB**

#### **Model names**

- GW MAGMB1.EM
- GW MAGMB1.CM

#### Mounting

- With Zhaga Book 3 LED holder Ideal Industries Chip-Lok™ holder 50-2101CR Mounting with 2 screws M3 x 8mm Green indicator marks
- With Zhaga Book 11 LED holder
   BJB Spotlight connector 47.319.6111
   Mounting with 2 screws M3 x 8mm
   Orange indicator marks





#### **Osram Soleriq S19 LED COB**

#### **Model names**

• GW-KAHLB1-xxxx

#### Mounting

With Zhaga Book 3 LED holder
 BJB spotlight connector 47.319.2170
 TE Connectivity Lumawise type Z50 2213407-1
 TE Connectivity Lumawise type Z50 2213407-2
 Mounting with 2 self tapping screws M3 x 8mm
 Green indicator marks









## **Mounting Options**





#### Osram Soleriq E30 LED COB

#### **Model names**

- GW KAJRB2.EM-STTQ-xxxx
- GW KAJRB2.EM-TPTR-xxxx

#### **Mounting**

- Direct mounting with 2 self tapping screws M3 x 6mm Green indicator marks
- With Zhaga Book 3 LED holder
   BJB spotlight connector 47.319.2090
   Mounting with 2 self tapping screws M3 x 8mm
   Green indicator marks





#### **Osram Soleriq E45**

#### **Model names**

- GW KALRB3.EM-TSTU-xxxx
- GW KALRB3.EM-TUUQ-xxxx

#### Mounting

 Direct mounting with 2 self tapping screws M3 x 6mm Screw head of 6mm or more is recommended Blue indicator marks

### **Philips LED Modules**

# PHILIPS

The third Philips Fortimo LED SLM generation is the ideal solution for spot lighting fixtures and highly efficient compact down light luminaires. It is specifically designed for the retail market showcasing retail merchandise in bright and vivid light. This generation is equipped with new Chip-On-Board (COB) LED technology. This technology enables the creation of the most efficient point source Philips LED system available.

#### Mounting indicator marks overview

MechaTronix recommends the use of a high thermal conductive interface between the LED module and the LED cooler. Either thermal grease, a thermal pad or a phase change thermal pad thickness 0.1-0.15mm is recommended. Thermal pads or phase change thermal pads can be preapplied from MechaTronix.







#### Philips Fortimo SLM GEN3 / GEN4 LED Modules

#### **Model names**

- Fortimo LED SLM 4000 G3
- Fortimo LED SLM 4500 G3
- Fortimo LED SLM 4500 G4

#### **Mounting**

 Direct mounting with 2 self tapping screws M3 x 6mm Green indicator marks









# **Mounting Options**


### **Prolight Opto LED COB's**



Founded in October 2004, Prolight Opto Technology Corporation is a professional manufacturer of LED packaging, dedicated to the research, development, and manufacturing of mid-to-high-power, high reliability LED packages. Prolight Opto continually invests over 6% of sales revenue in R&D and patents. With own package patents from the US and Taiwan they insure a wide range of LED emitters in the smallest foot prints and COB LED modules with perfect thermal management and high density lumen output.

#### Mounting indicator marks overview

MechaTronix recommends the use of a high thermal conductive interface between the LED module and the LED cooler. Either thermal grease, a thermal pad or a phase change thermal pad thickness 0.1-0.15mm is recommended. Thermal pads or phase change thermal pads can be preapplied from MechaTronix.







#### **Prolight Opto BI series PABA COB**

#### **Model names**

- PABA-22xxx-xxxx
- PABA-26xxx-xxxx
- PABA-35xxx-xxxx
- PABA-50xxx-xxxx

#### Mounting

With Zhaga Book 3 LED holder
 BJB spotlight connector 47.319.2040
 Mounting with 2 self tapping screws M3 x 6mm
 Green indicator marks





#### **Prolight Opto CF series PACF COB**

#### **Model names**

• PACF-57xxx-xxxx

#### Mounting

With Zhaga Book 3 LED holder
 BJB Spotlight connector 47.319.2021
 TE Connectivity Lumawise type Z50 2213254-1
 TE Connectivity Lumawise type Z50 2213254-2
 Mounting with 2 self tapping screws M3 x 6mm
 Green indicator marks





#### **Prolight Opto CG series PACG COB**

#### **Model names**

• PACG-110xxx-xxxx

#### Mounting

With Zhaga Book 3 LED holder
 BJB Spotlight connector 47.319.2030
 Mounting with 2 self tapping screws M3 x 6mm
 Green indicator marks









## **Mounting Options**





#### **Prolight Opto CIII series PACD COB**

#### **Model names**

• PACD-40xxx-xxxx

#### **Mounting**

• With Zhaga Book 3 LED holder BJB Spotlight connector 47.319.2030 Mounting with 2 self tapping screws M3 x 6mm **Green indicator marks** 


### **Sharp LED Modules & COB**

# SHARP

Sharp Zenigata Chip on Board (COB) technology leverages 40 years of LED expertise to help your products outshine the competition with some of the highest brightness-per-watt in the industry. Sharp's new Mega Zenigata 50W - 80W modules take traditional, high-power lighting applications head on with power-saving LED alternatives. Sharp Devices Europe has launched an important new portfolio of LED modules dubbed INTERMO. The Standard INTERMO is a Zhaga Book 3 form-factor module, which ensures compatibility with a large eco-system of third-party products.

#### Mounting indicator marks overview

MechaTronix recommends the use of a high thermal conductive interface between the LED module and the LED cooler. Either thermal grease, a thermal pad or a phase change thermal pad thickness 0.1-0.15mm is recommended. Thermal pads or phase change thermal pads can be preapplied from MechaTronix.









#### **Sharp INTERMO Standard / Slim LED Modules**

#### **Model names**

- GW7MMCxxGZC 3000 lm
- GW7MGDxxGZC 3000 lm
- GW7MMDxxGZC 4000 lm
- GW7MGExxGZC 4000 lm
- GW7MMExxGZC 5000 lm

#### Mounting

• Direct mounting with 2 self tapping screws M3 x 6mm **Green indicator marks** 









# **Mounting Options**



#### Sharp Mega Zenigata 25-40W/35-50W/50-80W LED COB

#### **Model names**

- GW5DxCxxM04
- GW6DxCxxNFC
- GW6DxDxxNFC
- GW5DxExxMR5
- GW6DxExxNFC

#### **Mounting**

• With Zhaga Book 3 LED holder

BJB spotlight connector 47.319.2011

Ideal Industries Chip-Lok™ holder 50-2100SH

Mounting with 2 self tapping screws M3 x 6mm

Green indicator marks





#### **Sharp Tiger Zenigata 25W LED COB**

#### **Model names**

• GW6TGCBG40C

#### **Mounting**

With Zhaga Book 3 LED holder
 BJB spotlight connector 47.319.2051
 Mounting with 2 self tapping screws M3 x 6mm
 Green indicator marks









## **Mounting Options**


### **Vossloh Schwabe LED Modules**

# LIGHTING SOLUTIONS

Vossloh-Schwabe is an independent brand within the Panasonic Group responsible for the global development of the business area "Components for light technology". Panasonic employs 367,000 members of staff with an annual turnover of 76.75 billion Euros (8692.7 billion yen) and is represented throughout the world by more than 634 companies or representations in Asia, America and Europe.The Vossloh Schwabe Luga Shop LED modules are ideal solution for high-end luminaire designs where quality stands at the first place.

#### Mounting indicator marks overview

MechaTronix recommends the use of a high thermal conductive interface between the LED module and the LED cooler. Either thermal grease, a thermal pad or a phase change thermal pad thickness 0.1-0.15mm is recommended. Thermal pads or phase change thermal pads can be preapplied from MechaTronix.







### Luga Industrial LED modules

#### **Model names**

• WU-M-467 / WU-M-443

#### Mounting

• Direct mounting with 4 self tapping screws M3 x 10mm Red indicator marks





#### **Luga Shop 2014 LED modules**

#### **Model names**

- WU-M-484 / WU-M-461
- WU-M-485 / WU-M-462
- WU-M-486 / WU-M-464

#### Mounting

• Direct mounting with 2 self tapping screws M3 x 10mm Green indicator marks





#### **Luga Shop 2014 Kit LED COB**

#### **Model names**

- DMS128
- DMS158

#### Mounting

- With Luga Shop Kit holder
- Mounting with 2 self tapping screws M3 x 6mm Green indicator marks












# **Drawings & Dimensions**

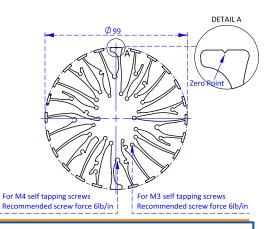



# Example: IceLED Xtra 550




# **Thermal Data**

Pd = Pe x (1-ηL)			LED Light efficiency, ηL (%)			Heat sink to ambient thermal resistance R <sub>hs-amb</sub> (°C/W)	Heat sink to ambient temperature rise T <sub>hs-amb</sub> (°C)
			17%	20%	25%	IceLED Xtra 550	IceLED Xtra 550
Dissipated Power Pd(W)	20	Electrical Power Pe(W)	24.1	25.0	26.7	0.50	10
	25		30.1	31.3	33.3	0.49	12
	30		36.1	37.5	40.0	0.49	15
	35		42.2	43.8	46.7	0.49	17
	40		48.2	50.0	53.3	0.48	19
	50		60.2	62.5	66.7	0.48	24
	60		72.3	75.0	80.0	0.47	28
	70		84.3	87.5	93.3	0.47	33
	80		96.4	100.0	106.7	0.47	37

Heat sink to ambient temperature rise  $T_{hs-amb}$  (°C)

IceLED Xtra 550

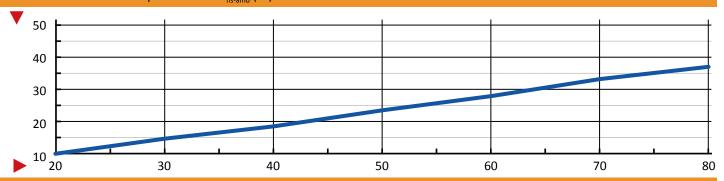

Dissipated Power Pd(W)

