

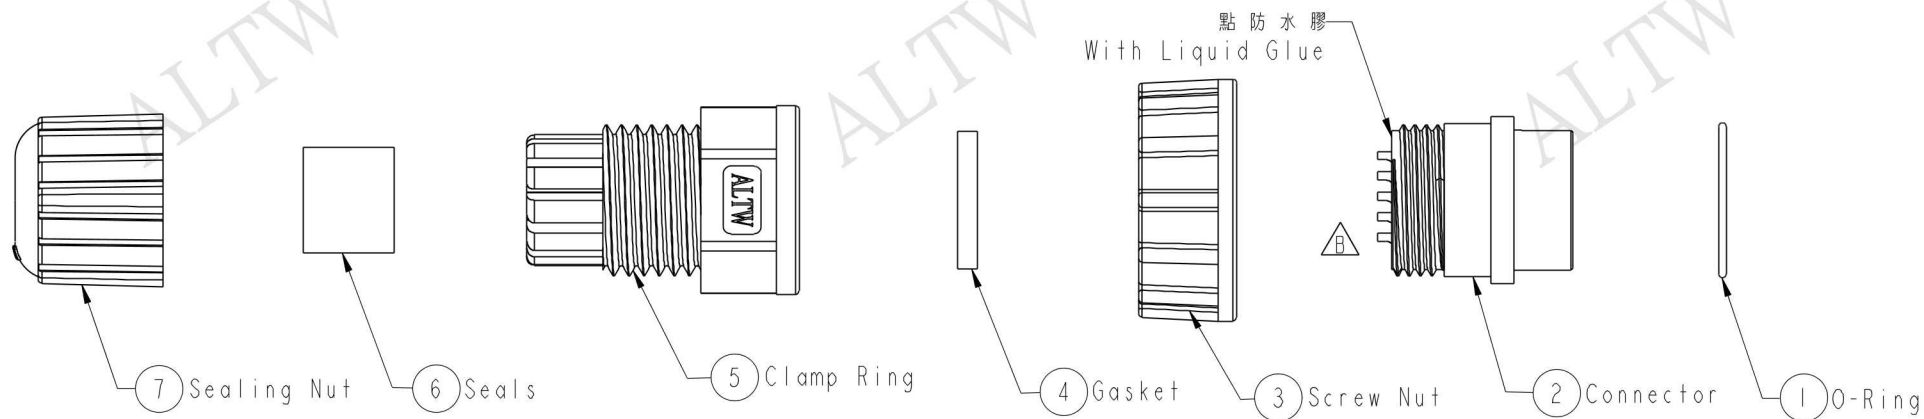



REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN-0C0606	2010/11/26	Ivan	Change View
C	LEN14A0141	2014/10/13	Sam	Modify Pin Assignments View.

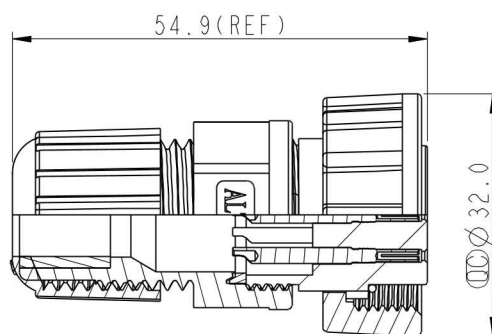

Note:

- * $\varnothing$ Important Dimension.
- * Waterproof Rate: IP67
- * Connector: 18Pin Female Conn, Black
- * Female Pin: Copper Alloy, Gold Plated
- * Screw Nut: Nylon+GF, Black
- * O-Ring: EPDM, Black
- * Gasket: Silicone, Black
- * Sealing Nut: Nylon, Black
- * Clamping Ring: Nylon, Black
- * Seals: EPDM, Black
- * Seal For Cable OD: $\varnothing 5.5\text{mm} \sim 10.8\text{mm}$
- * One Set Unassembled In One PE Bag

Pin Assignments
Front View

UNIT: mm	
TOLERANCE	
.X	± 0.25
.XX	± 0.1
.XXX	± 0.05
ANGLES	$\pm 1^\circ$

TITLE Screw Type Connector For Field Installation 180° 18Pin Female Connector Female Pin(5A)			
SCALE 1:1	SIZE A4	SHEET 1 OF 1	
REV. C	WC-REV. A.2	$\varnothing$: Inspection item	

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO. DD-18BFFA-SL7001	DRAWN BY Sam	DATE 2014-10-13
DWG. NO. DD-18BFFA-SL7001	CHECKED BY Rita	DATE 2014-10-13
CUSTOMER ALTW	APPROVED BY Win	DATE 2014-10-13