




REV.	ECN NO.	DATE	SIGN	DESCRIPTION
A	Initial Release	2013/03/14	Tom_gu	Change Rev.1 To Rev.A

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

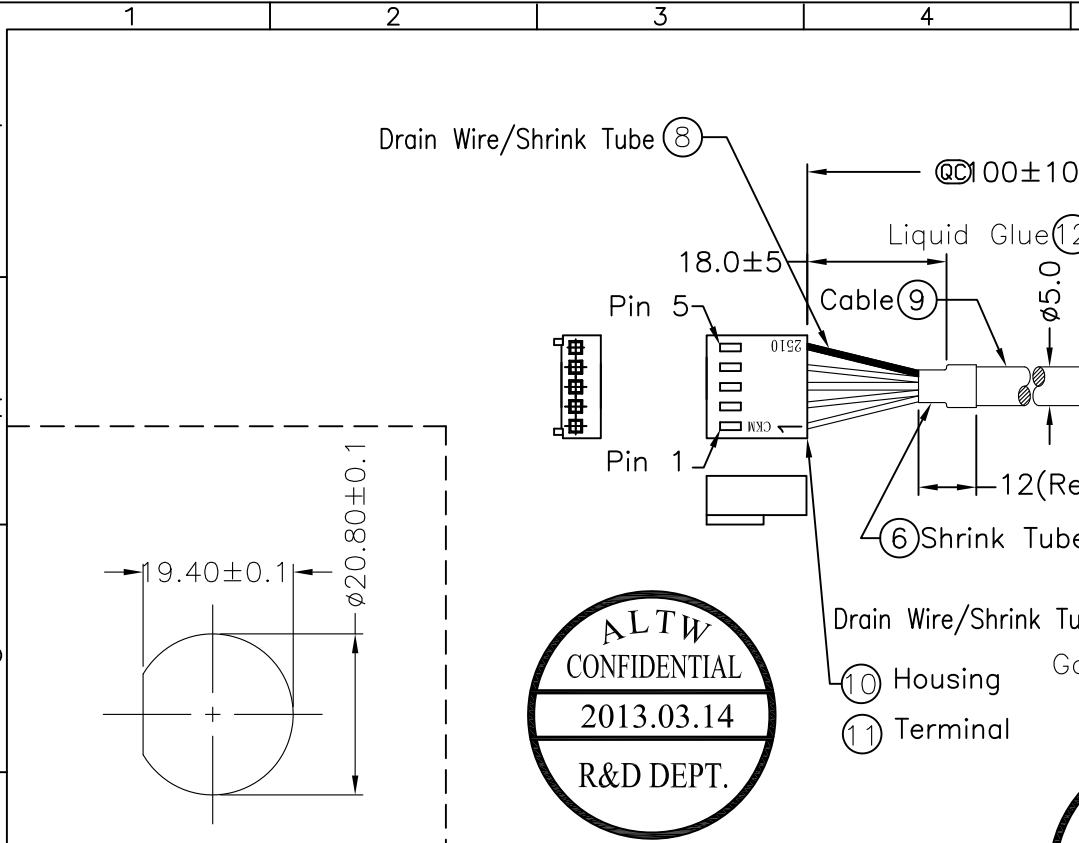


Conn.
Waterproof Rate: IP68
1M Depth Of Water In 24hours

Recommended Panel Cut-Out

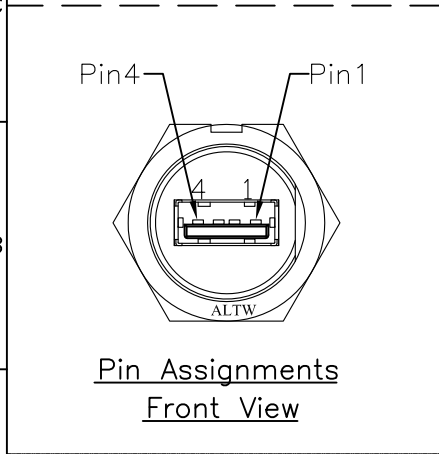

⑬ Wafer			
④ 12.7±0.35			
④ 5.8			
5	Drain	地線	Shield
4	Black 24AWG	黑	4
3	Green 28AWG	綠	3
2	White 28AWG	白	2
1	Red 24AWG	紅	1
Housing	Wire Color	Conn.	
Pin Out			



- Note:
- * @@Important Dimension.
 - * Shell: ABS 94V-0, Black
 - * Connector: USB A Female, Gold Plated
 - * Gasket: EPDM, Black
 - * Screw Nut: Nylon+GF, Black
 - * Housing: Nylon 66UL 94V-2, 5Pin, White
CKM 25410101-05 PH2.54
 - * Terminal: Phosphor bronze, Tin-plated CKM 25410301
 - * Wafer: Nylon66 UL94V-2, PH=2.54, Cream Colored
CKM 15410201-05 (Housing Matting Part)
 - * Wafer Need To Packing With Bag Every 50 Pcs
 - * Cable: USB2.0 28AWG*1P+24AWG*2C+AL/My+D+B,
PVC Jacket Resist UV, OD=5.0mm, Black
 - * Use with waterproof cap or dust cap
For Panel Thickness Max: 2.8mm
 - * Use without waterproof cap or dust cap
For Panel Thickness Max: 4.0mm

UNIT:mm				TITLE USB,USB A,Panel UA-20PMFP+Housing			Amphenol LTW 安費諾亮泰企業股份有限公司			ITEM NO PCDUA-20PMFP-SC8002		DRAWN BY Tom_gu		DATE 2013/03/14		
TOLERANCE .X ±0.25 .XX ±0.1 .XXX ±0.05 ANGLES ±1°										SCALE Free		SHEET 1 OF 1		DWG NO PCDUA-20PMFP-SC8002		CHECKED BY Mafei
				REV. A		SIZE A4				CUSTOMER LT001121		APPROVED BY Maslow		DATE 2013/03/14		
				QC :Inspection Item												
1		2		3		4				5		6		7		8 FMW0702-01-01A2

Amphenol LTW
安費諾亮泰企業股份有限公司