




REV.	ECN NO.	DATE	SIGN	DESCRIPTION
A		2017/03/29	Kris	Initial Release
B	CI90405	2019/03/14	Ruru	Modify Note
C	CI90541	2019/04/16	JC Chen	Modified parts

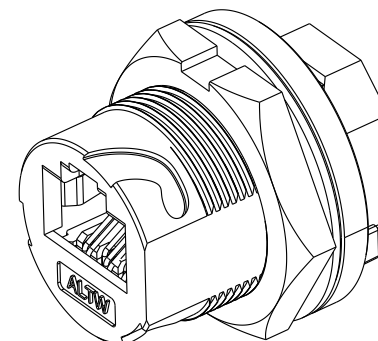

13/16"-28UN



Metal Shell



3

28.20

17.90

3.0

2 Jack

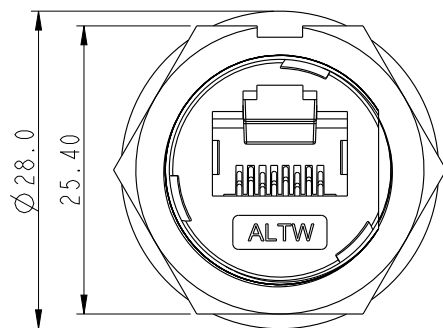

28.0

25.40

ALTW

Inverse RJ Board


1

4 Spring Washer

5 Nut

B Note:

- * $\varnothing$ Important Dimension to check
- * Waterproof Rate: IP67, Mated
- * Insert Housing: Thermoplastic, Black
- * Pin: Copper Alloy, Gold Plated
- * Metal Shell & Jack & Nut: Metal, Nickel Plated
- * O-Ring: Silicone Gray-Black.
- * Spring Washer: Stainless steel.
- * Use without waterproof cap or Dust cap for panel thickness Max:4.2mm
- * Use with waterproof cap or Dust cap for panel thickness Max:3.0mm
- * Screw Torque :9~12kgf-cm
- * Gasket and Nut are packed separately in PE bags.

Recommended
Panel Cut-out
Front View

UNIT:mm	
TOLERANCE	
.X	±0.25
.XX	±0.1
.XXX	±0.05
ANGLES	±1°

TITLE RJ45 Cat.6A Receptacle			
SCALE 3:2	SIZE A4	SHEET 1 OF 1	
REV. C	WC-REV. A.17	$\varnothing$: Inspection item	

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO RCM-6APFFH-TCM7001	DRAWN BY JC Chen	DATE 2019-04-16
DWG NO RCM-6APFFH-TCM7001	CHECKED BY Li Feng	DATE 2019-04-16
CUSTOMER ALTW	APPROVED BY Jerry	DATE 2019-04-16