



**Reflector Flood, Ø 92 mm,
63.8° beam angle
47.950.-307.56**

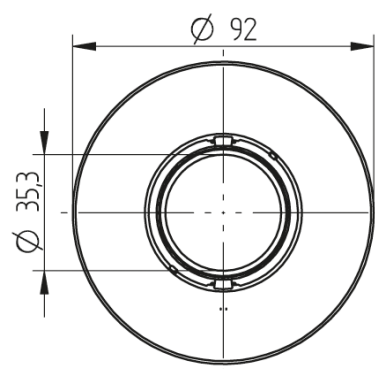

Reflector Flood, Ø 92 mm, 63.8° beam angle 47.950.-307.56

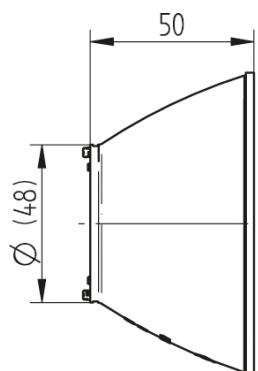

DESCRIPTION

Reflector can only be used by screw fixing the spotlight connector with dome headed screws and locking washer

*Beam angle (FWHM) measured with Citizen CLU38 and connector 47.319.2314.50. Beam angle depends on the COB used.

Product name:	Reflector Flood, Ø 92 mm, 63.8° beam angle
Short description:	For use with Spotlight connectors 47.319.2xxx and Spot-, Downlight modules 32.120.xxxx
Beam angle characteristic:	Flood
Beam angle:	63.8°
Material:	PC
Optical efficiency:	63.8%
Pkg.:	192