




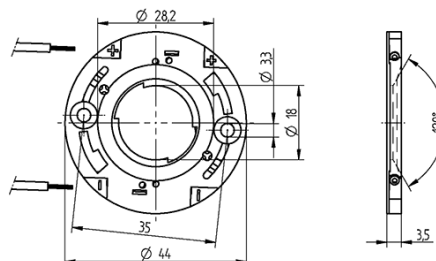

Technology for Light

COB connector Ø 44 mm for LED array 20 x 24 mm 47.360.5090.50



8.0 ± 1 mm



0,35-0,5 mm²



0.35-0.5 mm²



Technology for Light

COB connector Ø 44 mm for LED array 20 x 24 mm 47.360.5090.50

DESCRIPTION

With integrated COB holder and interface for reflectors 47.940

Easy pre-assembly of LED

Screw mounting: for screws M3 and locking washer

Max. torque for screw fixing 0.5 Nm*

Strip length: 8+1 mm

With wire release function

Polarity symbols of connector and LED must be observed in assembly

Specification of LED manufacturer must be observed

In a series connection of LED modules, the air gap and creepage distances has to be sized that each module covers the total voltage of the series connection

*Please note the max torque of the COB manufacturer

Product name:	COB connector Ø 44 mm for LED array 20 x 24 mm
Mounting method 1:	Screw mount
Mounting method 2:	P2F fixing with 28.902.-102
Prefixation of COB:	Yes
Material:	Housing: PBT Contacts: CuSn
LED manufacturer:	Bridgelux, Luminus
LED Typ:	Vesta (LES 15 mm, DIM to warm), CDM-14 / CDM-18
Conductor cross-section:	0.35-0.5 mm ²
Rating:	Rating: 3A / 150 VDC
Weight:	4
Pkg.:	378

Suitable for the following LED models:

LED Manufacturer	LED Type	More Information
Bridgelux	Vesta (LES 15 mm, DIM to warm)	http://www.bridgelux.com
Luminus	CDM-14 / CDM-18	http://www.luminus.com