
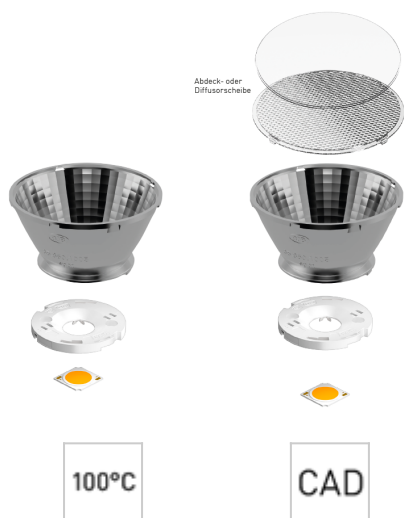
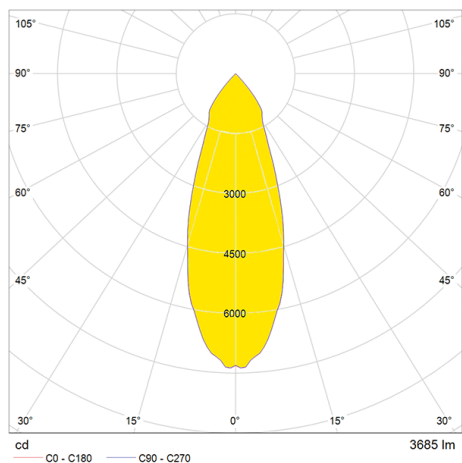



Reflector Flood Ø 74 mm

35.850.1007.56



Reflector Flood Ø 74 mm

35.850.1007.56



DESCRIPTION

Reflector is optimized for use with connectors **47.319.2013 / 2021 / 2025 / 2026 / 2345** and **47.360.5010.50** with Ø 50 mm

- Reflector interface is adapted to the mixing cone of the connector
- Possibly visually disruptive openings of the connector are partly covered

Recommended for COB's with LES < 17 mm

Beam angle (FWHM) measured with Citizen CLU38 and connector **47.319.2025.50**.

Beam angle depends on used COB and its LES.

Product name:	Reflector Flood Ø 74 mm
Short description:	Reflector is optimized for use with connectors 47.319.2013 / 2021 / 2025 / 2026 / 2345 and 47.360.5010.50 with Ø 50 mm
Beam angle characteristic:	Flood
Material:	PC, Aluminium coated
Height:	36,9
Mounting method:	Bayonet fixing by Twist & Lock action
Weight:	58
Pkg.:	300