


DETAILS

Product Number	CS15418_STRADA-IP-2X6-SCL
Family	Strada-IP
Type	Assembly
Color	clear
Diameter	173x71,4 mm
Height	9,6 mm
Style	rectang
Optic Material	
Holder Material	
Fastening	
Status	production ready
ROHS Compliant	Yes
Date Updated	8/09/2016




OPTICAL PROPERTIES

LED	Viewing Angle	Light Beam	Efficiency	cd/lm	Connector
XM-L	sim: Asymmetric	Asymmetric	-	-	-
XP-G2	Asymmetric deg	Asymmetric	94 %	0.730	-
XP-G3	Asymmetric deg	Asymmetric	94 %	0.710	-
XP-L	Asymmetric deg	Asymmetric	94 %	0.710	-
H35C1 (LEMWA33)	Asymmetric deg	Asymmetric	94 %	0.680	-
LUXEON T	Asymmetric deg	Asymmetric	94 %	0.750	-
NVSxx19B/NVSxx19C	Asymmetric deg	Asymmetric	96 %	0.800	-

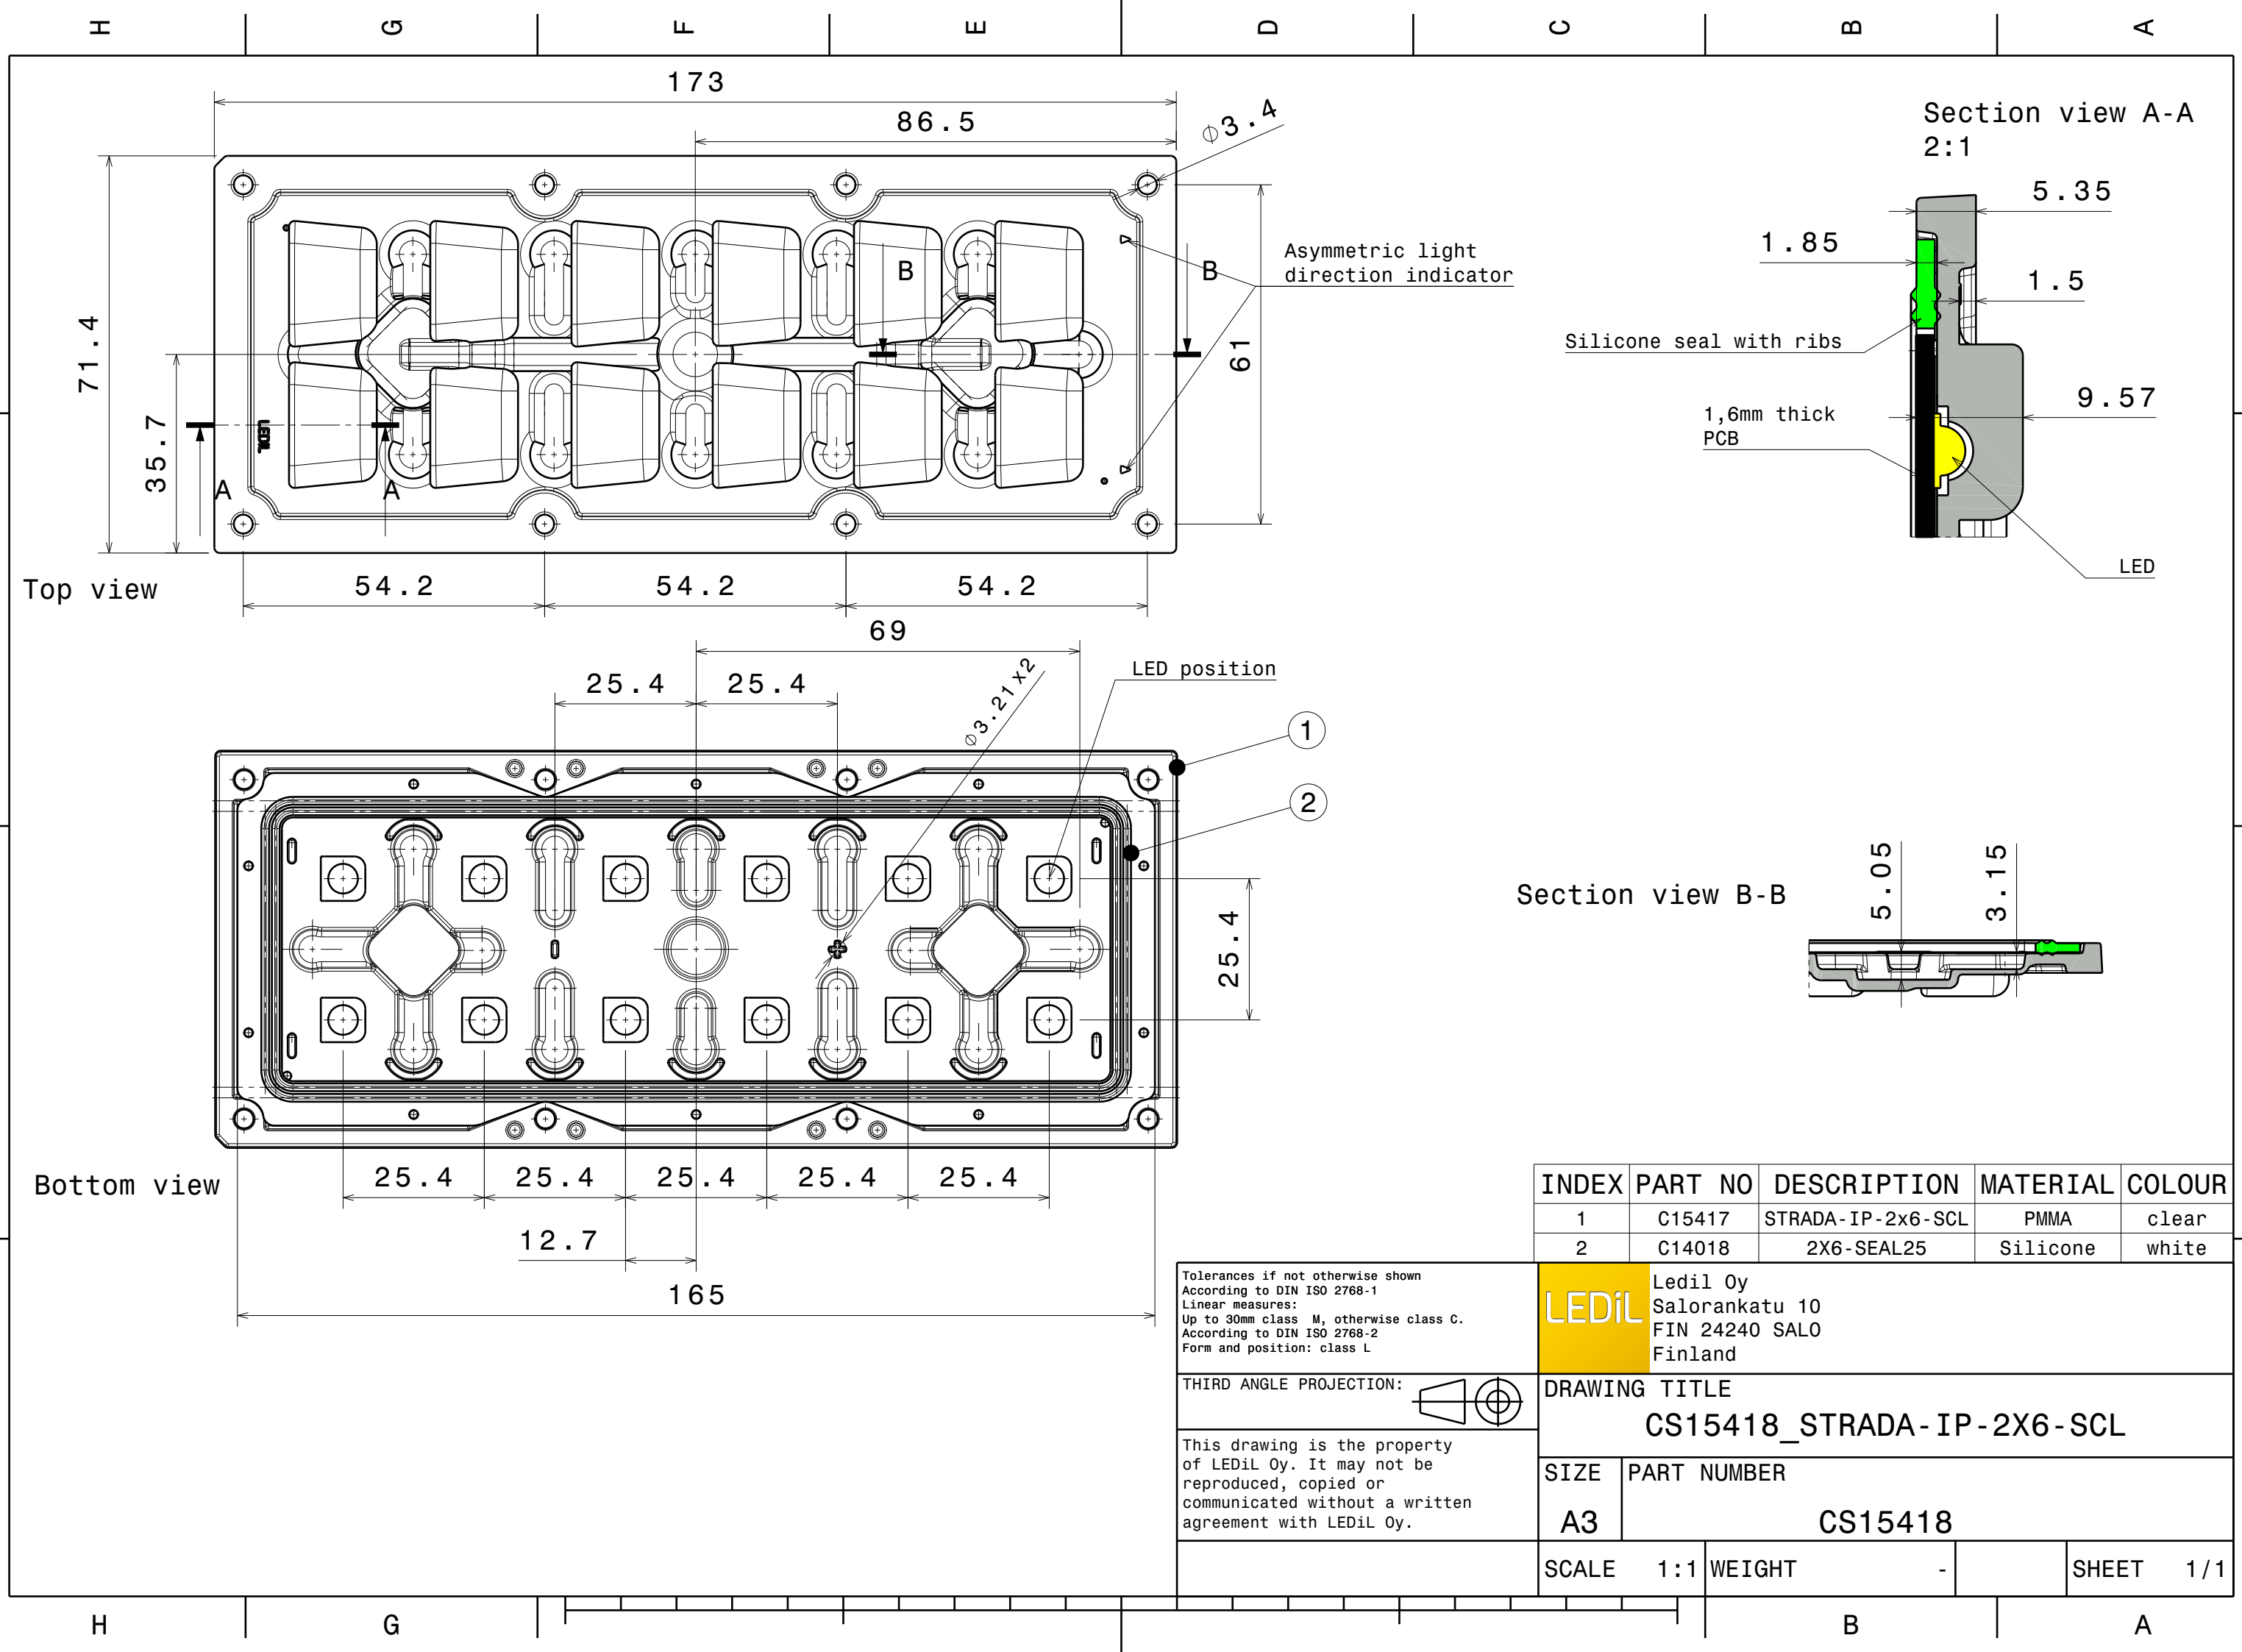

INDEX	PART NO	DESCRIPTION	MATERIAL	COLOUR
1	C15417	STRADA-IP-2x6-SCL	PMMA	clear
2	C14018	2X6-SEAL25	Silicone	white


Tolerances if not otherwise shown
According to DIN ISO 2768-1
Linear measures:
Up to 30mm class M, otherwise class C.
According to DIN ISO 2768-2
Form and position: class L




This drawing is the property
of LEDiL Oy. It may not be
reproduced, copied or
communicated without a written
agreement with LEDiL Oy.

LEDiL Ledil Oy Salorankatu 10 FIN 24240 SALO Finland	
DRAWING TITLE CS15418_STRADA-IP-2X6-SCL	
SIZE A3	PART NUMBER CS15418
SCALE 1:1	WEIGHT -
SHEET 1/1	

Luminaire: Ledil CS15418_STRADA-IP-2X6-SCL_(XP-G2)
Lamps: 1 x Cree_XP-G2_2x6_1265.56lm@250mA_P=8.6335W_I=0.25A

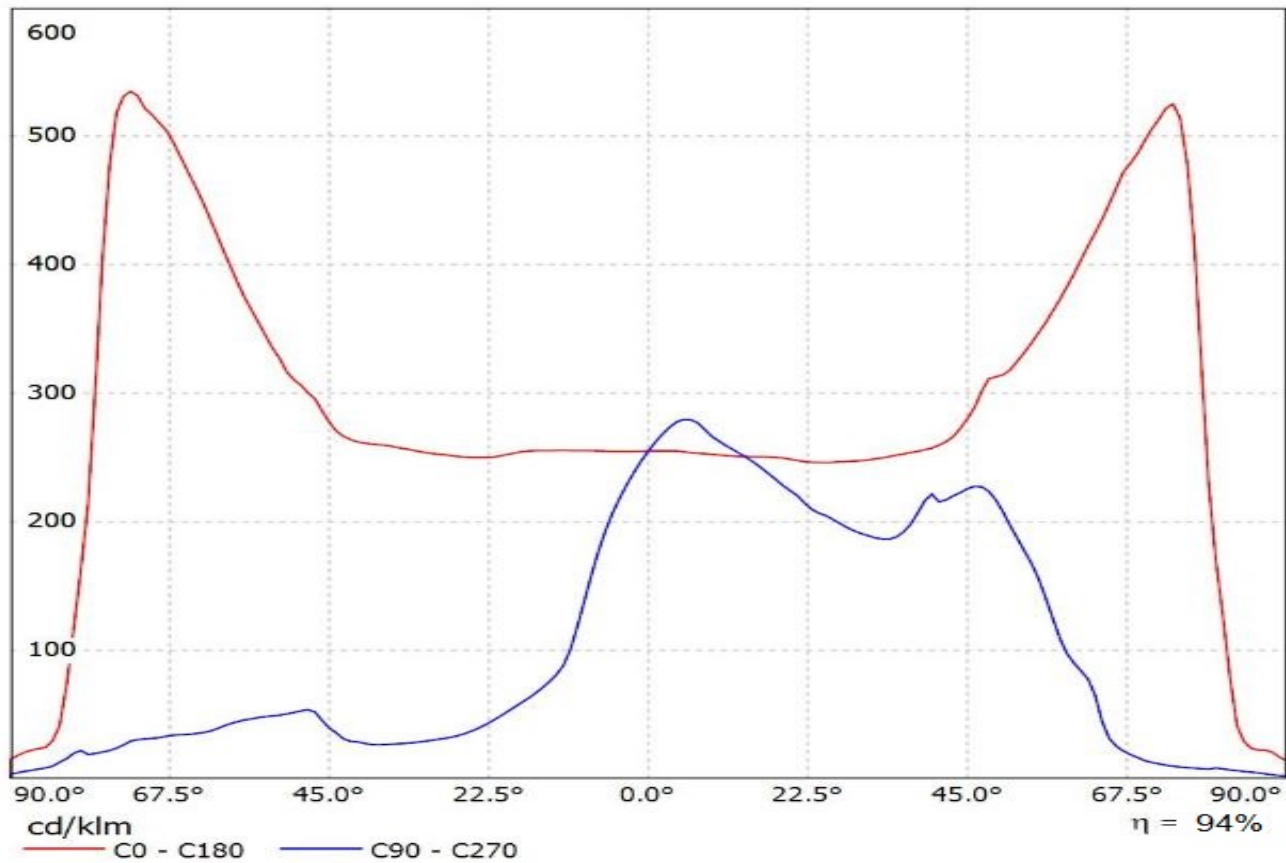


Luminaire: Ledil CS15418_STRADA-IP-2X6-SCL_(XP-G3)
Lamps: 1 x Cree_XP-G3_2x6_1519.22lm@250mA_P=8.25375W_I=0.250A

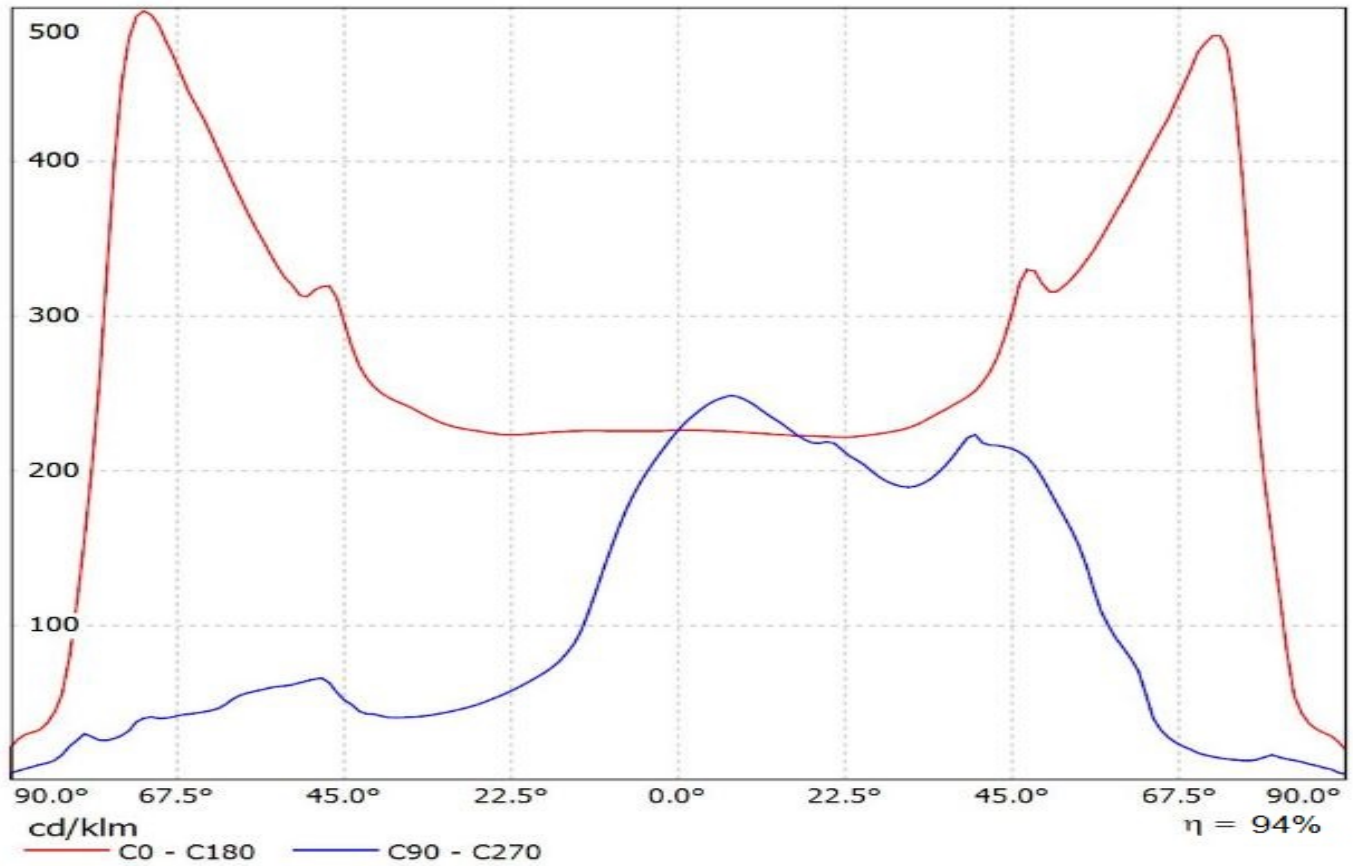


Luminaire: LEDiL Oy CS15418_STRADA-IP-2X6-SCL_(XP-L)


Lamps: 1 x Cree_XP-L_(XPLAWT-0-7A3-U50-0H-0001)_1258.85lm@250mA_P=8.27562W_I=0.250A

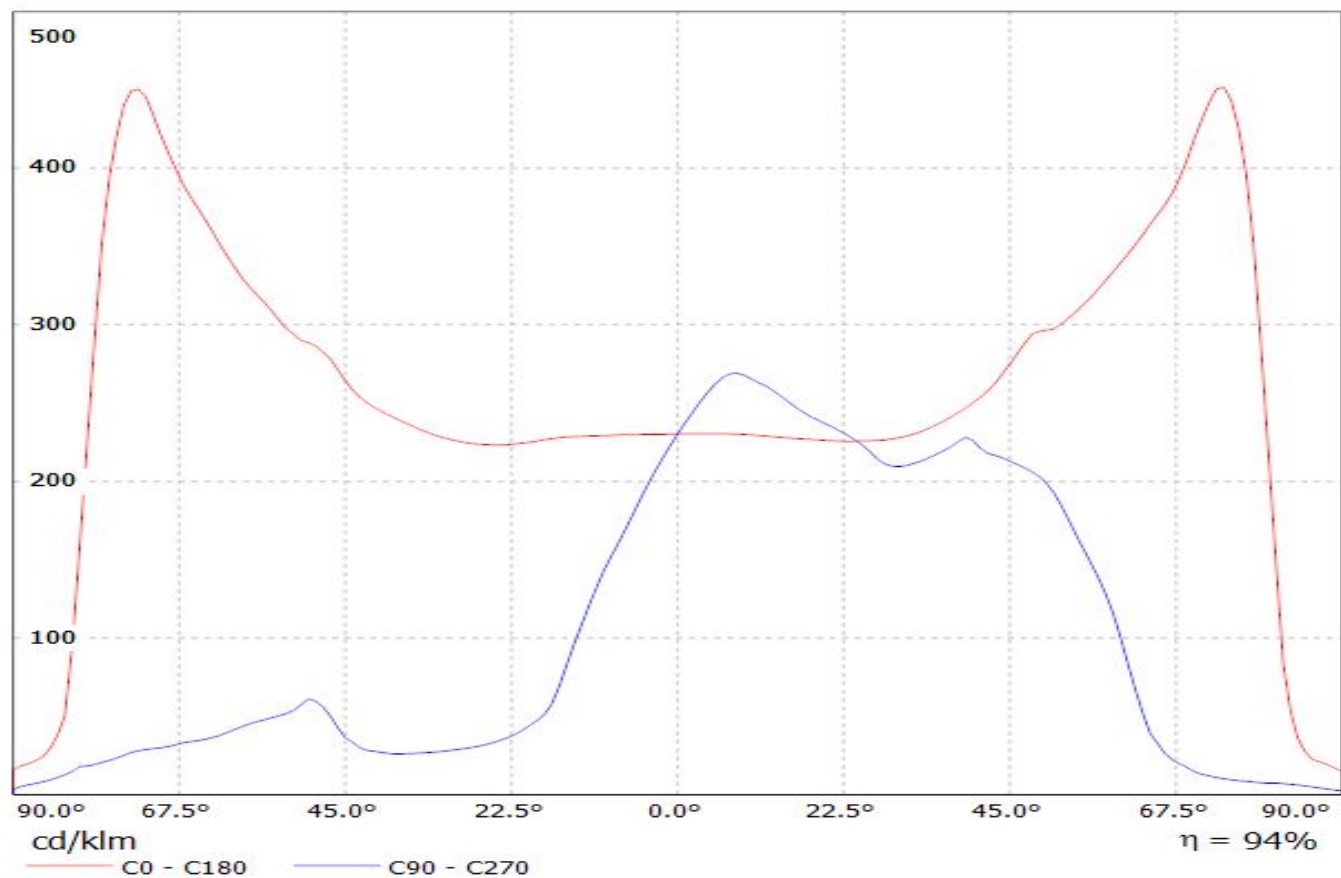

Luminaire: Ledil CS15418_STRADA-IP-2X6-SCL_(H35C1)
Lamps: 1 x LG_H35C1_2x6_1389.53lm@250mA_CCT=5700_P=8.59425W_I=0.250A

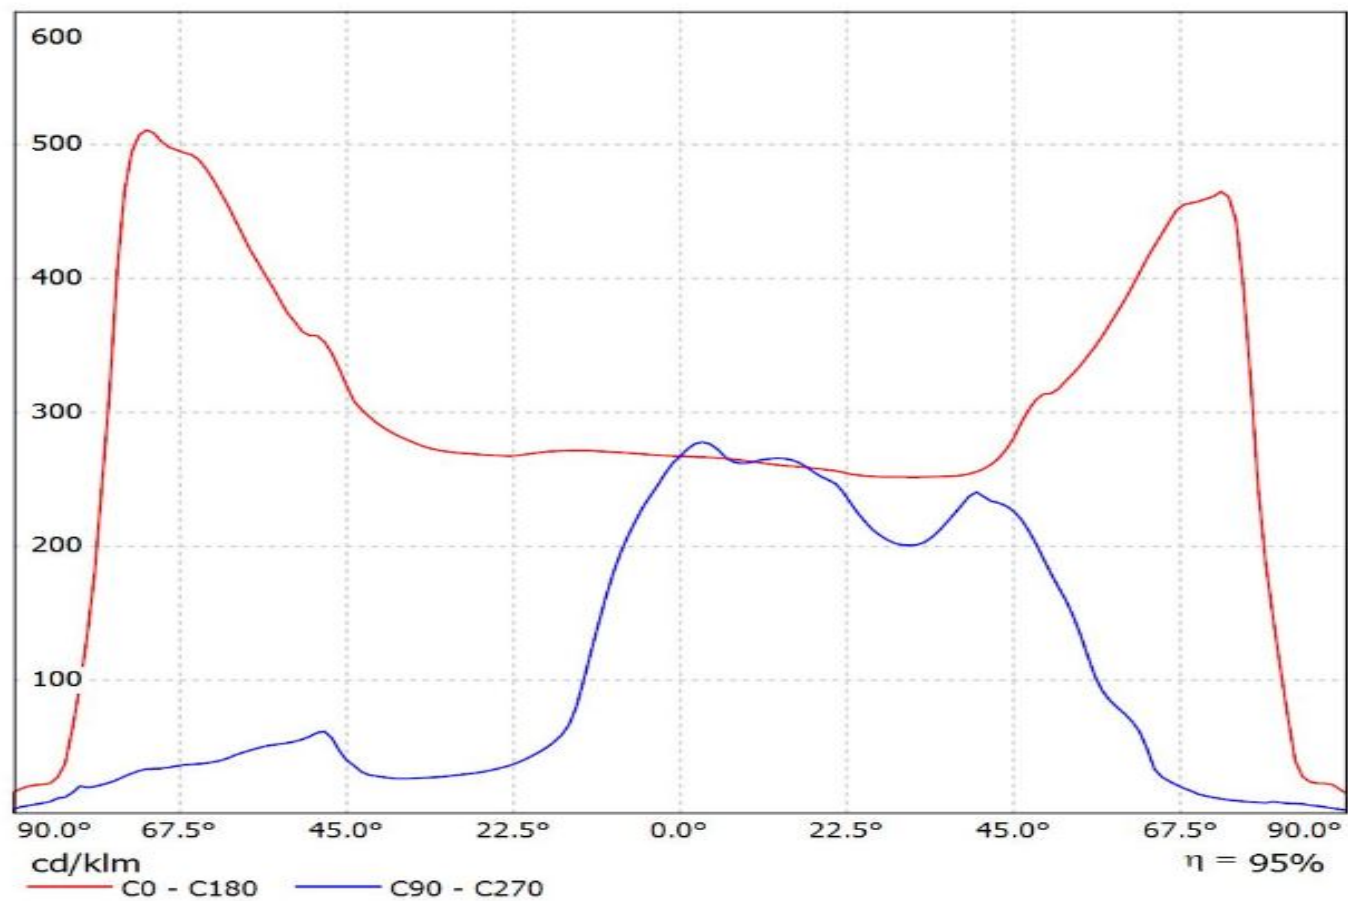


Luminaire: LEDiL Oy CS15418_STRADA-IP-2X6-SCL_(Luxeon_T)
Lamps: 1 x Luxeon_T_(LXH8-FW30)_1040.41lm@250mA_P=8.49754W_η=0.250A

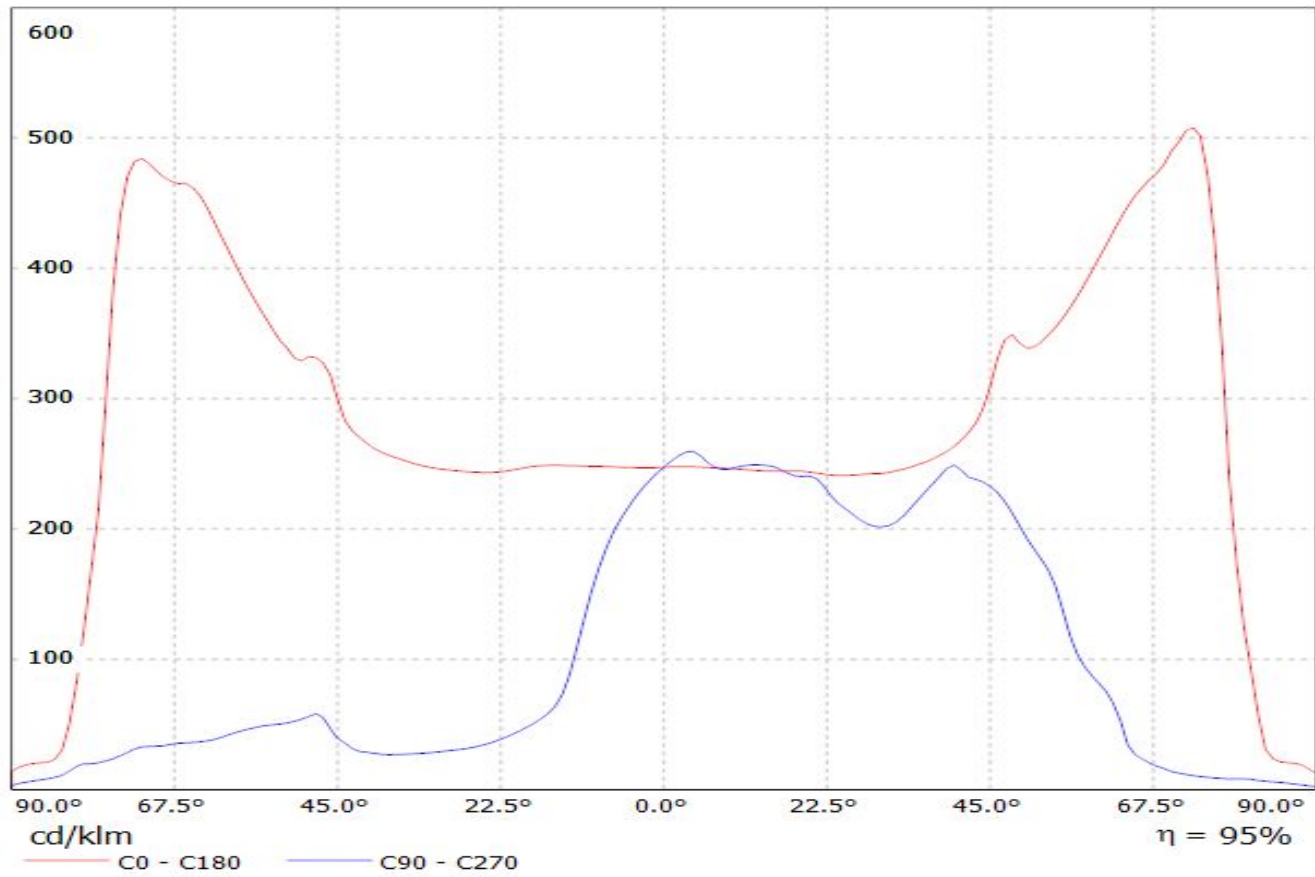


Luminaire: Ledil CS15418_STRADA-IP-2X6-SCL_(NVSL219CT)

Lamps: 1 x Nichia_NVSL219CT_2x6_1262.53lm@250mA_P=8.35825W_I=0.25A

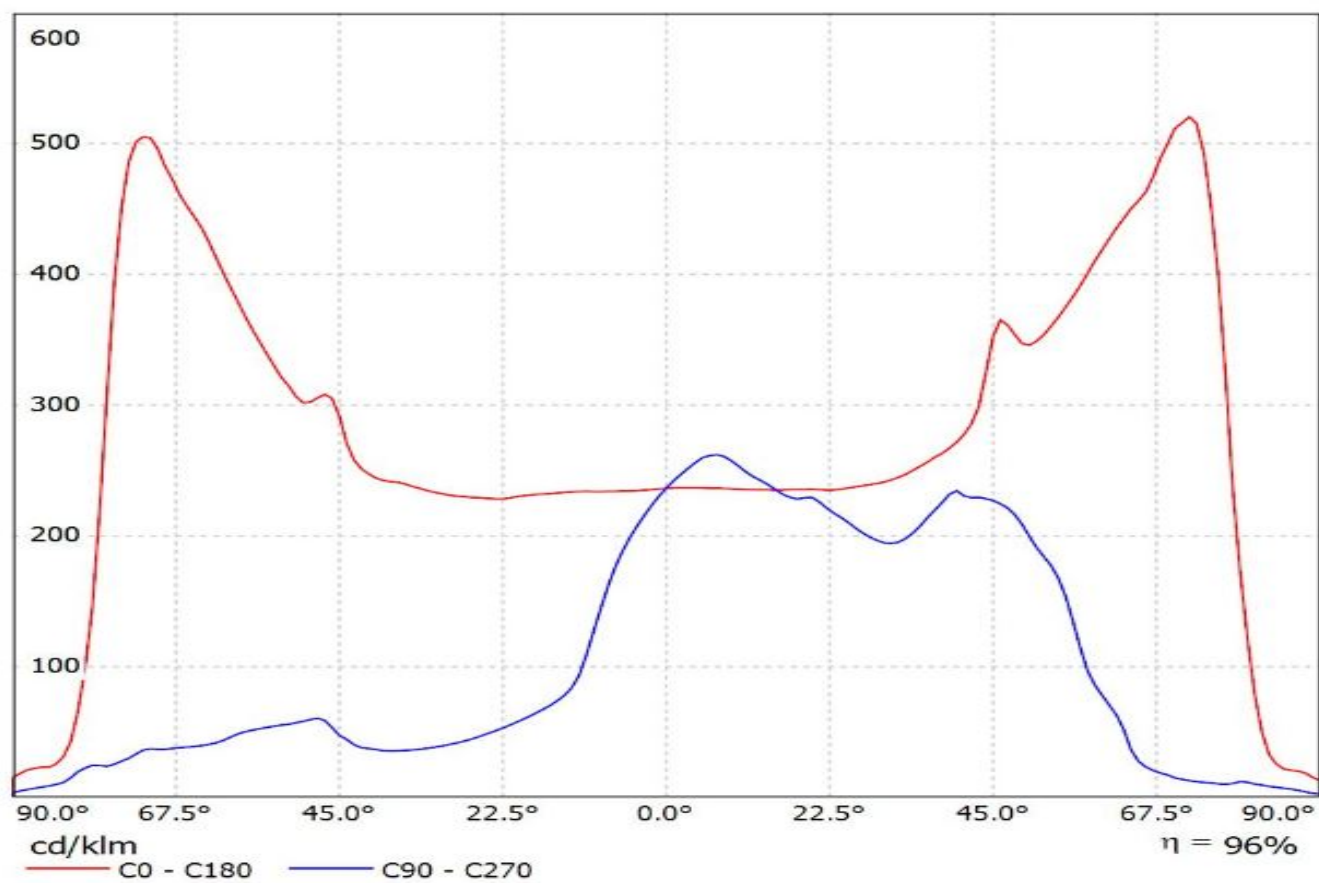


Luminaire: Ledil CS15418_STRADA-IP-2X6-SCL_(XP-G2)
Lamps: 1 x Cree_XP-G2_2x6_1265.56lm@250mA_P=8.6335W_I=0.25A

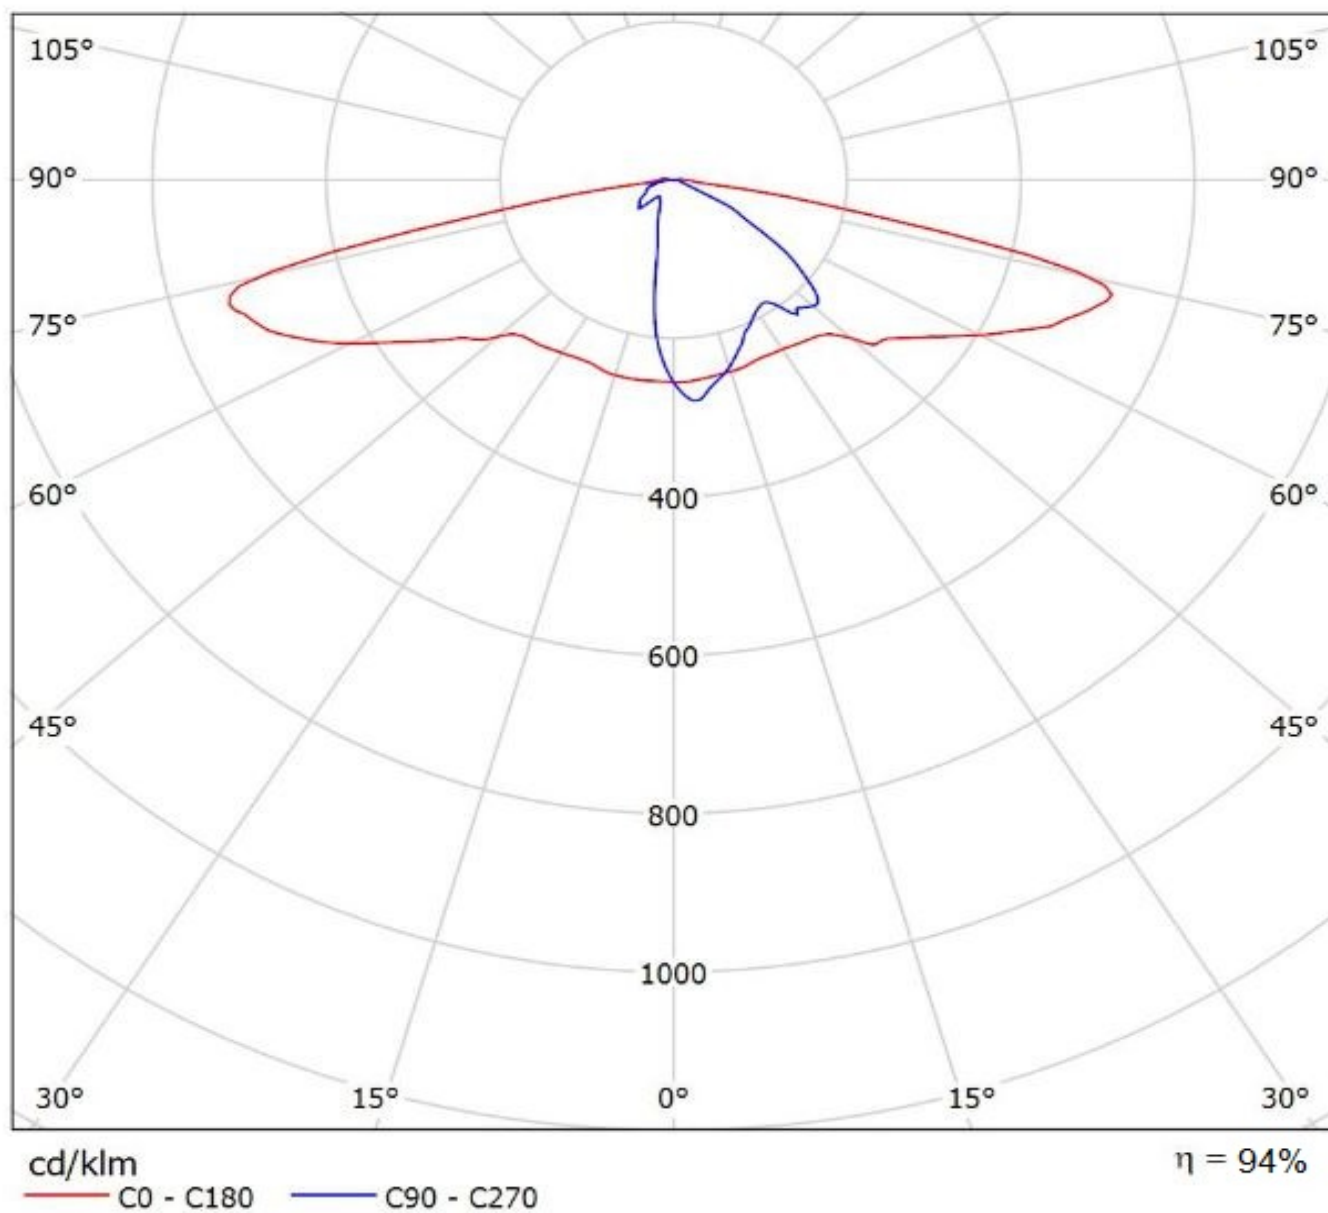


Luminaire: Ledil CS15418_STRADA-IP-2X6-SCL_(XP-G3)

Lamps: 1 x Cree_XP-G3_2x6_1519.22lm@250mA_P=8.25375W_I=0.250A

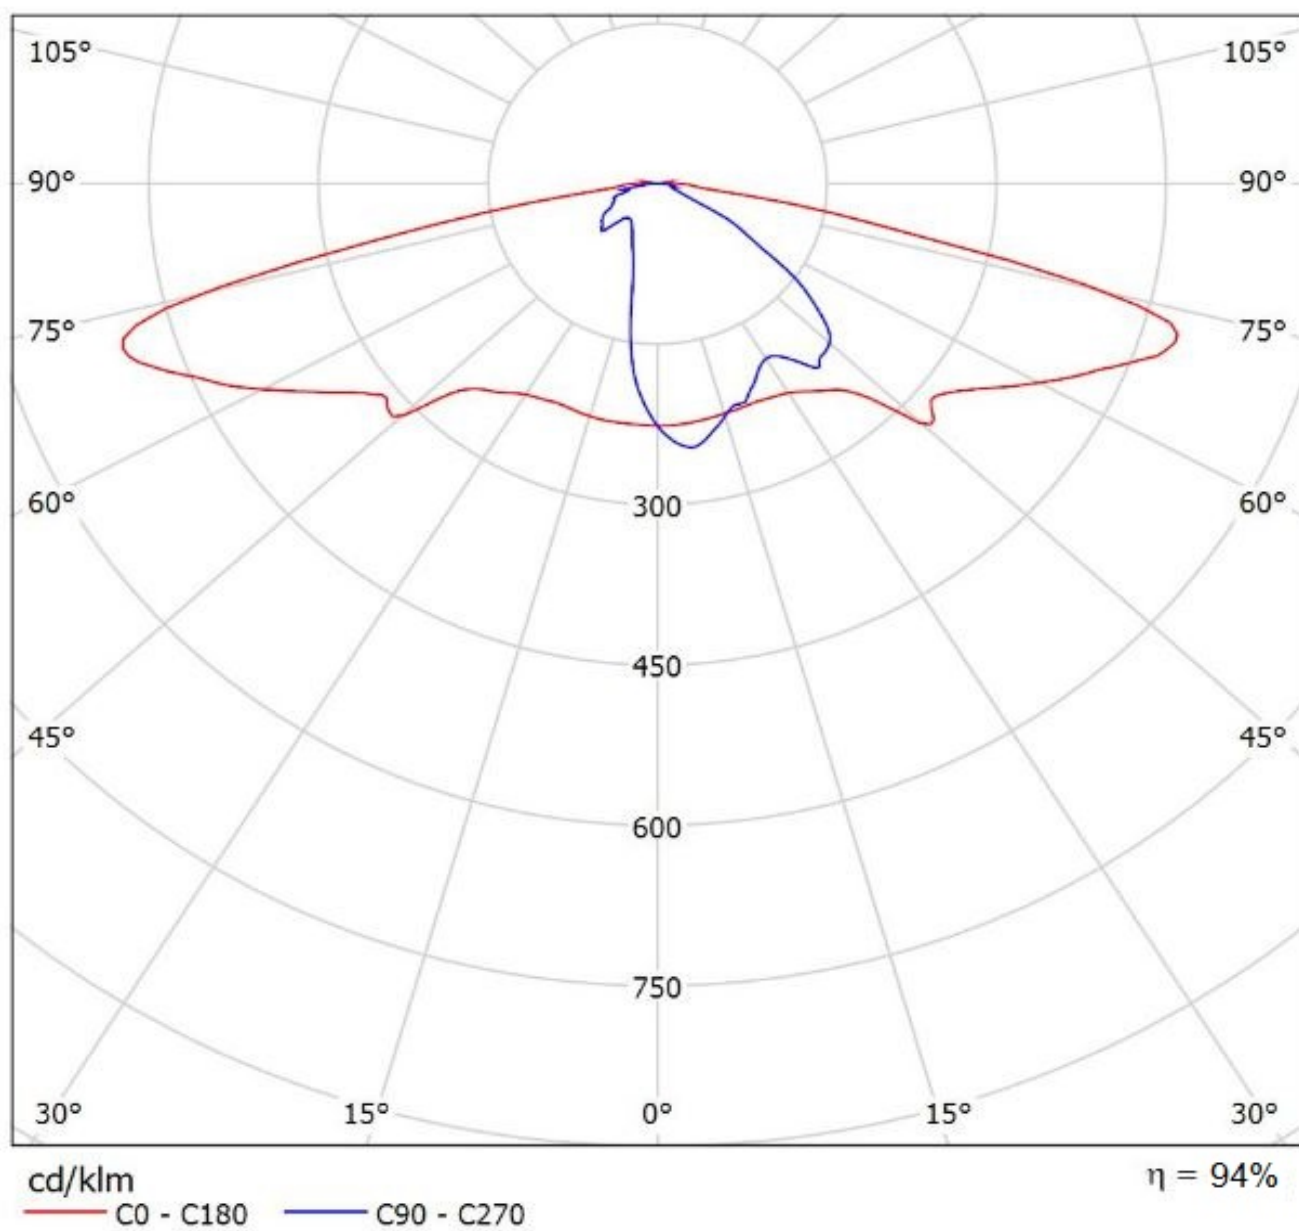


Luminaire: LEDiL Oy CS15418_STRADA-IP-2X6-SCL_(XP-L)

Lamps: 1 x Cree_XP-L_(XPLAWT-0-7A3-U50-0H-0001)_1258.85lm@250mA_P=8.27562W_I=0.250A

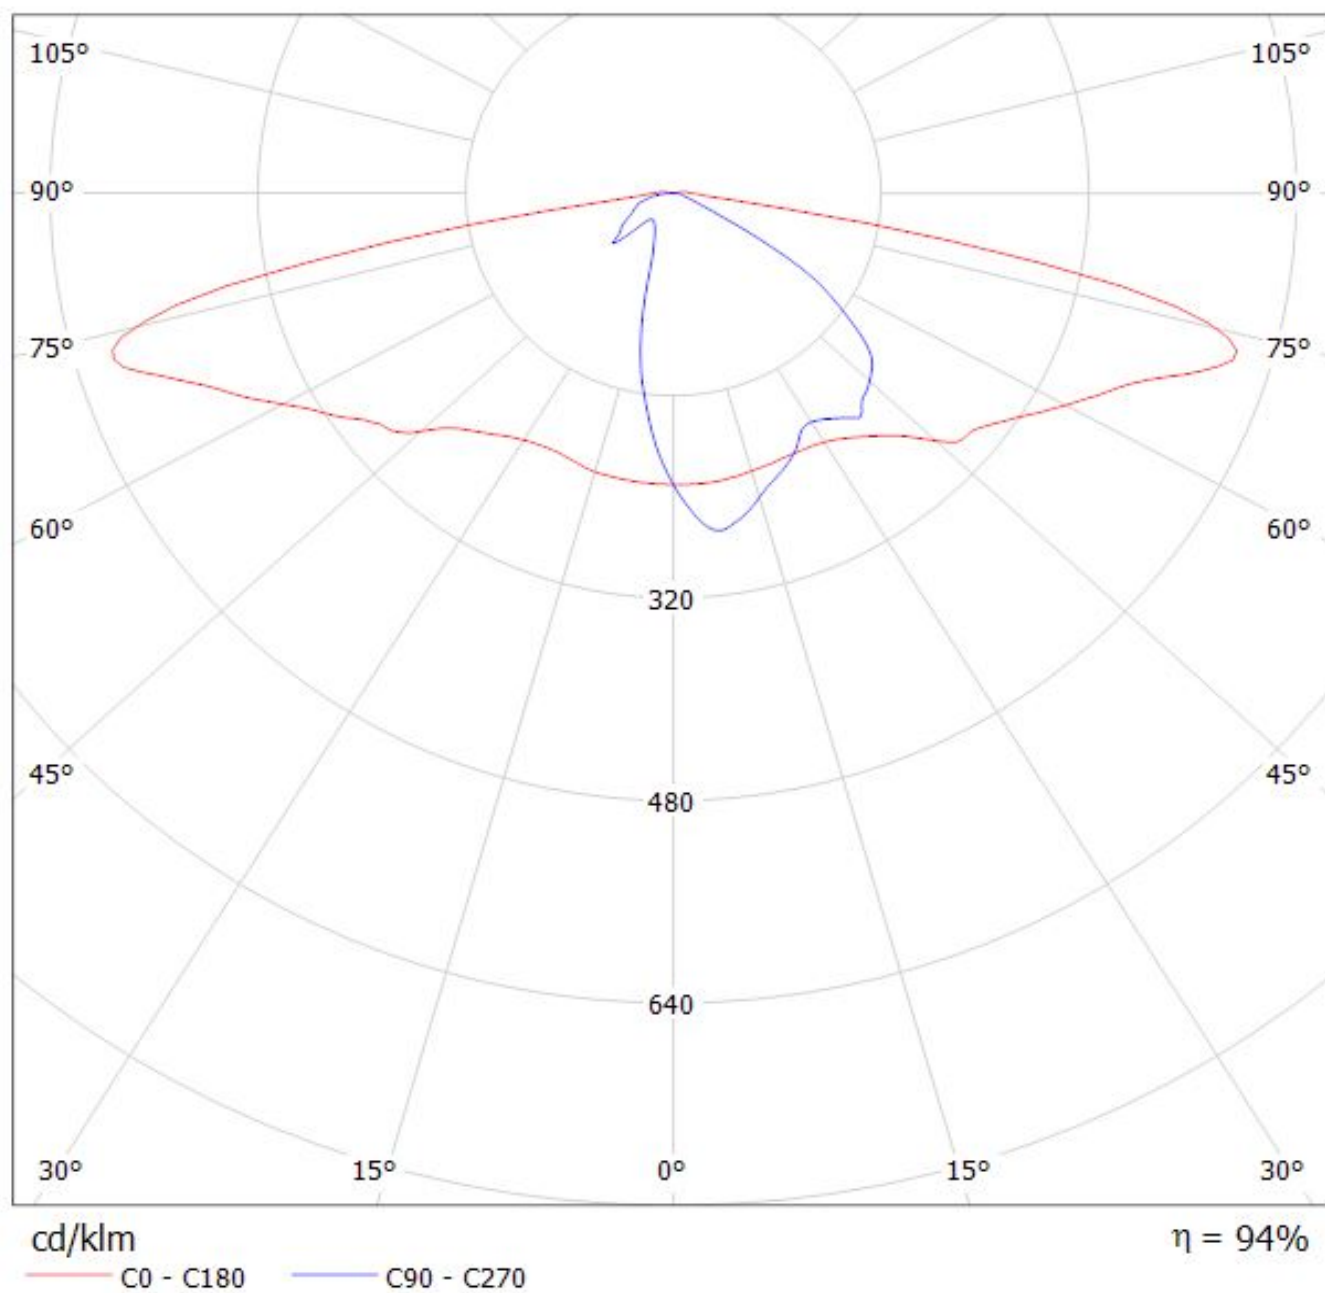


Luminaire: Ledil CS15418_STRADA-IP-2X6-SCL_(H35C1)

Lamps: 1 x LG_H35C1_2x6_1389.53lm@250mA_CCT=5700_P=8.59425W_I=0.250A

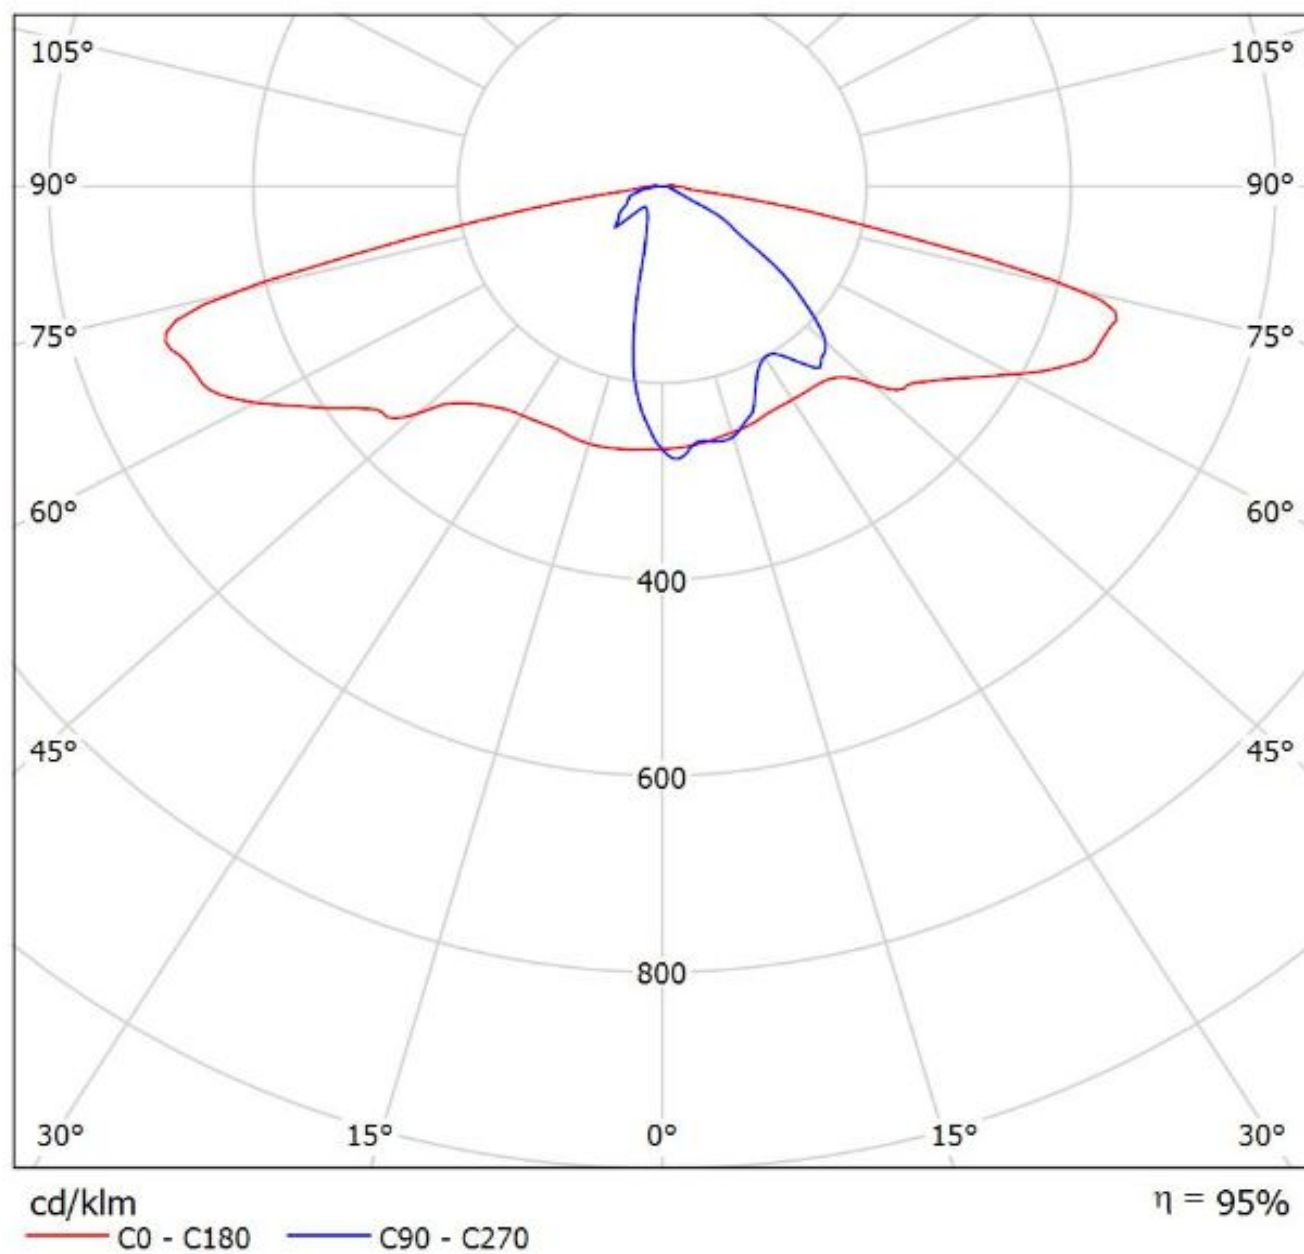


Luminaire: LEDiL Oy CS15418_STRADA-IP-2X6-SCL_(Luxeon_T)
Lamps: 1 x Luxeon_T_(LXH8-FW30)_1040.41lm@250mA_P=8.49754W_I=0.250A

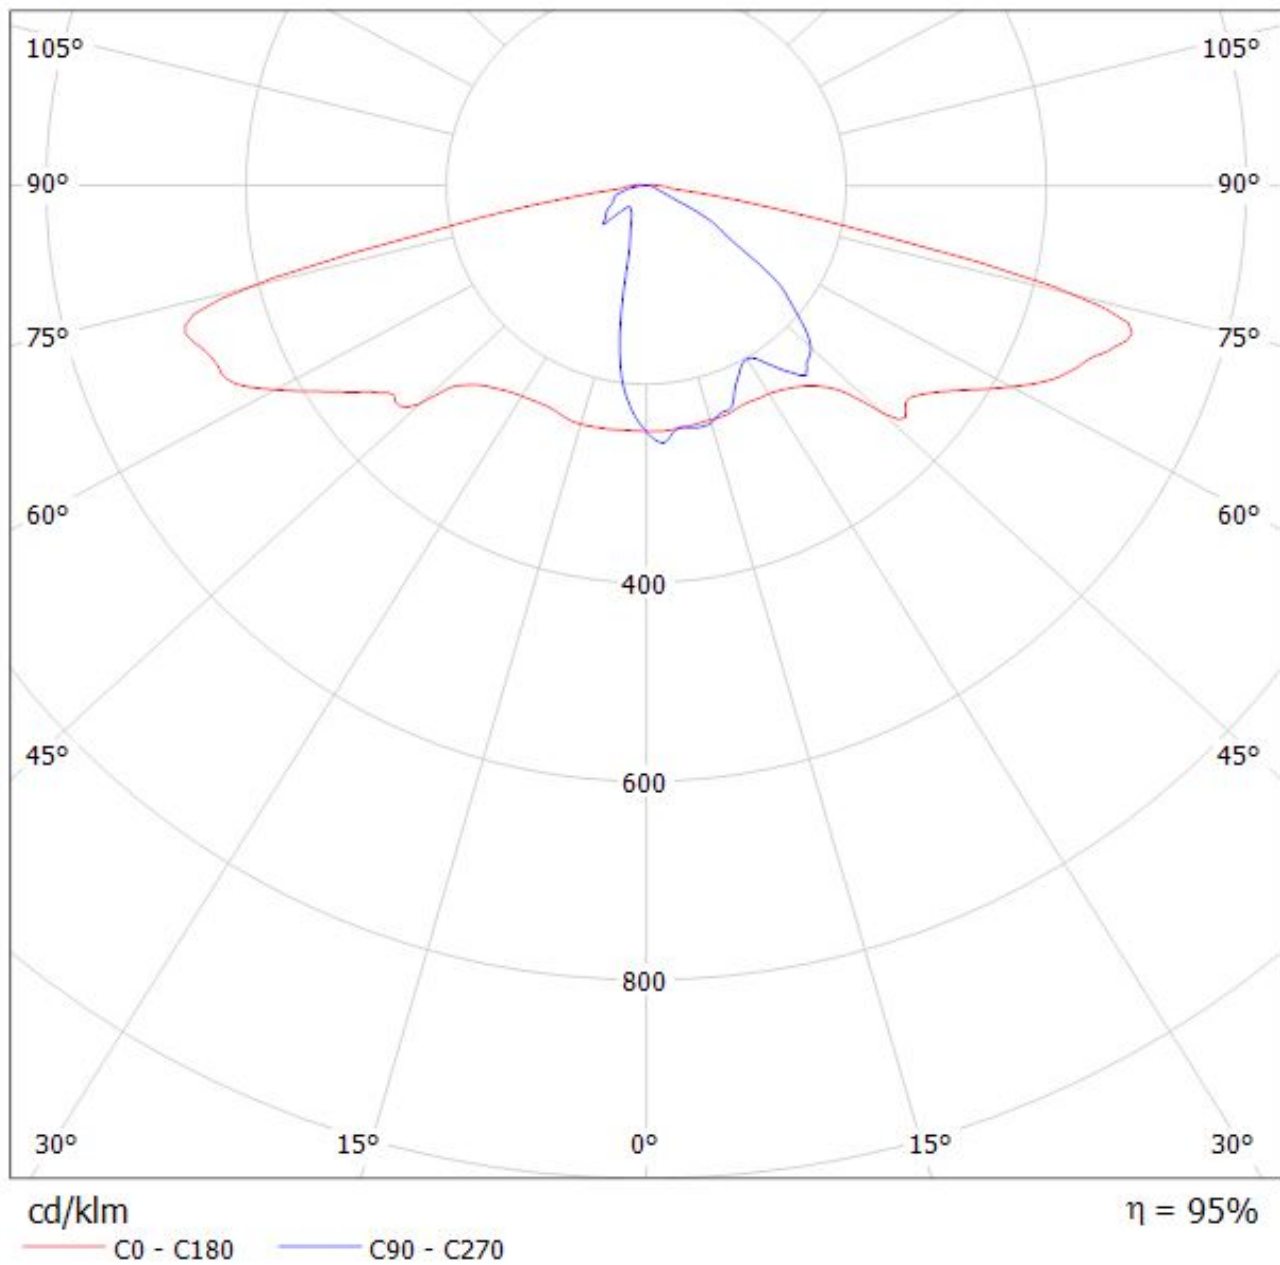

Luminaire: Ledil CS15418_STRADA-IP-2X6-SCL_(NVSL219CT)

Lamps: 1 x Nichia_NVSL219CT_2x6_1262.53lm@250mA_P=8.35825W_I=0.25A

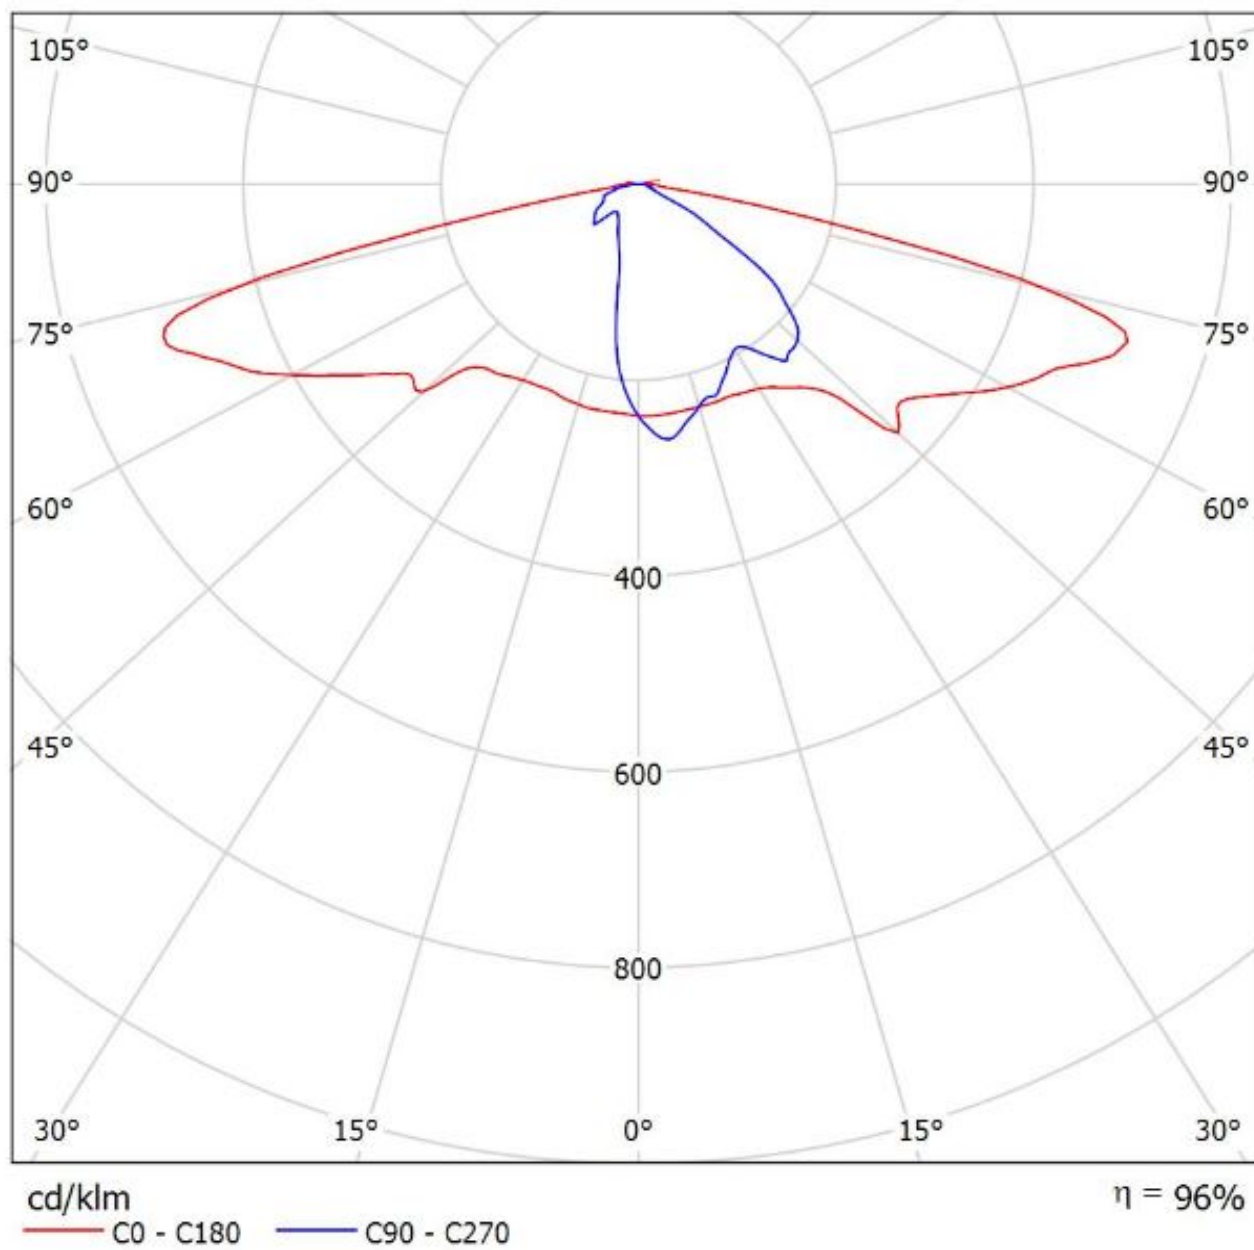

NOTE: The typical divergence will be changed by different color, chip size and chip position tolerance. The typical total divergence is the full angle measured where the luminous intensity is half of the peak value.