

# MechaTronix in LED

## LPF6768-ZHP Pin Fin LED Cooler ø67mm



### Features & Benefits

- For spot and downlight designs from 1,100 to 3,400 lumen
- Thermal resistance Rth 2.1°C/W
- Modular design with mounting holes foreseen for a wide range of LED modules and COB's:
  - Zhaga Book 3 Spot Light Modules Edison Edilex SLM, Osram PrevaLED Core AC / AC PRO / Z3 / Z4, Philips Fortimo SLM, Sharp INTERMO, Tridonic Talexx Stark SLE G3 / G4, Vossloh Schwabe Luga Shop, ...
  - Bridgelux BXRA ESR, Vero & Décor Vero 13 / 18, V-series
  - Citizen Citiled CLL022-CLU024, CLL032-CLU034
  - Cree XLamp CXA13, CXB13, CXA15, CXB15, CXA18, CXB18
  - Edison EdiPower II HM09, HM16, HM30
  - Lustrous LUSTRON 6 series LL613F / LL620F
  - LG Innotek LEMWM18 10W, 13W, 17W, 24W
  - Osram Soleriq P6, P9, S13, S19, E30
  - Lumileds Luxeon COB's 1203, 1204, 1205, 1208, Luxeon K arrays K12, K16
  - Prolight Opto PACE, PACF, PABA, PACB, PACC
  - Seoul Semiconductor ZC6, ZC12, ZC18, ZC25, ZC40
  - Sharp Mega Zenigata, Tiger Zenigata, Mini Zenigata
  - Tridonic Talexx Stark SLE GEN3 LES-17
- Diameter 67mm - Height 68mm  
Other heights on request
- Better performance under tilted position
- Forged from highly conductive aluminum



### Order Information



Example : LPF6768-ZHP-B

LPF6768-ZHP- **1**

- 1** Anodising Color
- B - Black
  - C - Clear
  - Z - Custom ( specify )

The LPF6768-ZHP pin fin LED cooler is designed in this way that you can mount LED modules from various manufacturers on the same LED cooler  
This LED cooler is thermally validated for all our eco partners mentioned on the left side


# MechaTronix in LED

## LPF6768-ZHP Pin Fin LED Cooler ø67mm



### Product Details

#### Model n°

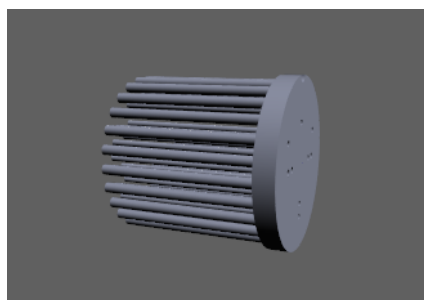

LPF6768-ZHP

Dimension (mm)* <sup>1</sup>	ø67 x h68
Volume (mm <sup>3</sup> )	63378
Cooling Surface (mm <sup>2</sup> )	56108
Weight (gr)	171
Thermal Resistance (°C/W)* <sup>2</sup>	2.1
Power Pd (W)* <sup>3</sup>	24
Heat Sink Material	AL1070

\*<sup>1</sup> 3D files are available in ParaSolid, STP and IGS on request

\*<sup>2</sup> The thermal resistance Rth is determined with a calibrated heat source of 30mm x 30mm central placed on the heat sink, Tamb 40° and an open environment. Reference data @ heat sink to ambient temperature rise Ths-amb 50°C  
The thermal resistance of a LED cooler is not a fix value and will vary with the applied dissipated power Pd

\*<sup>3</sup> Dissipated power Pd. Reference data @ heat sink to ambient temperature rise Ths-amb 50°C  
The maximal dissipated power needs to be verified in function of required case temperature Tc or junction temperature Tj and related to the estimated ambient temperature where the light fixture will be placed  
Please be aware the dissipated power Pd is not the same as the electrical power Pe of a LED module

To calculate the dissipated power please use the following formula:  $Pd = Pe \times (1 - \eta_L)$

Pd - Dissipated power

Pe - Electrical power

$\eta_L$  = Light efficiency of the LED module

#### Notes:

- MechaTronix reserves the right to change products or specifications without prior notice.
- Mentioned models are an extraction of full product range.
- For specific mechanical adaptations please contact MechaTronix.

No.818, Dashun 2nd Rd., Sanmin Dist., Kaohsiung City 80787, Taiwan

sales@mechatronix-asia.com www.led-heatsink.com www.mechatronix-asia.com

Tel: +886-7-381-5892 Fax: +886-7-383-9293 VAT: 28600841

# MechaTronix in LED

## LPF6768-ZHP Pin Fin LED Cooler ø67mm



### Mounting Options

The LPF6768-ZHP Pin Fin LED coolers are standard foreseen from a variety of mounting holes which allow direct mounting of LED engines, COB's and secondary optics on the LED heat sink.

In this way mechanical afterwork and related costs can be avoided, and lighting designers can standardize their designs on a limited number of LED coolers.

Below you find an overview of LED modules and COB's which standard fit on the LPF6768-ZHP Pin Fin LED cooler.

MechaTronix performs thermal validation tests on each of the LED modules mounted on the LED cooler and publishes this data in the LED brand thermal validation reports.

For more details about the required mounting holes and thermal results for your specific LED brand and model, please refer to the brand LED cooler datasheets under "Brand Products" and the brand LED cooler overview under the "Download" menu.


### Zhaga



The Zhaga Consortium is developing specifications that enable the interchangeability of LED light sources made by multiple different manufactures. The Zhaga specifications, known as Books, describe the interfaces between LED luminaires and LED light engines. Zhaga's members include hundreds of companies from throughout the global lighting industry. The cooperation is governed by a consortium agreement that defines rules regarding confidentiality, intellectual property and decision making.

#### Mounting indicator marks overview

MechaTronix recommends the use of a high thermal conductive interface between the LED module and the LED cooler. Either thermal grease, a thermal pad or a phase change thermal pad thickness 0.1-0.15mm is recommended. Thermal pads or phase change thermal pads can be pre-applied from MechaTronix.



### Zhaga Book 3 Spot Light Modules

Zhaga Interface Specification Book 3 defines the interfaces of LED light engines (LLEs) comprising a circular, non-socketable LED module with a separate LED driver (electronic control gear).

The circular LED modules in Book 3 have a typical diameter of 50 mm and a maximum height of 7.2 mm.

Zhaga Book 3 LED modules are mounted by 2 M3 screws evenly located on diameter of 35mm on the LED cooler.

There are four LLE categories in Book 3, which are defined by the maximum diameter of the circular light-emitting surface (LES): 9 mm, 13.5 mm, 19 mm, 23 mm.

Book 3 LLEs are suitable for spot-lighting and other applications that benefit from a small, circular source.

#### Zhaga book 3 compliant LED Spot Light modules \*1

- Edison Edilex SLM
- Osram PrevaLED CORE
- Philips Fortimo SLM
- Sharp INTERMO
- Tridonic Talexx Stark SLE
- Vexica Lumaera
- Vossloh Schwabe Luga Shop

\*1 This is a non-binding overview of available Zhaga book 3 LED modules at press

#### Zhaga Book 3 mounting through the use of LED holders and connectors

With the use of Zhaga Book 3 mechanical compatible LED holders, a wide variety of LED COB's can be mounted in the same way on these LED coolers.

Zhaga Book 3 compatible LED holders can be found from BJB, TE Connectivity (Tyco), Molex and Ideal Industries.





# MechaTronix in LED

## LPF6768-ZHP Pin Fin LED Cooler ø67mm



### Mounting Options



#### Zhaga Book 3 Spot Light Modules

##### LED COB's for which Zhaga book 3 LED holders are available

- Bridgelux V15, V18, ES rectangular LED array
- Citizen CitiLED CLL032, CLU034, CLL042, CLU044
- Cree XLamp CXA18xx, CXA25xx, CXA30xx
- Edison Opto HM16, HM30, HM40
- Lextar Nimbus 2000, 3000
- LG Innotek LEMWM18 (10W, 13W, 17W, 24W), LEMWM28 (40W)
- Lustrous Lustron LL613F, LL620F, LL630F, LL630D, LL660D
- Nichia J216, J360, L110, L121, L204
- Osram Soleriq P13, S13, S19, E30
- Lumileds Luxeon 1203, 1204, 1205, 1208, 1211 and 1216 Luxeon K12 and K16
- Prolight Opto PABA, PACC, PACD, PACF, PACG
- Samsung LC026, LC040
- Seoul Semiconductor ZC12, ZC18, ZC25, ZC40, ZC60
- Sharp Mega Zenigata and Tiger Zenigata
- Tridonic Talexx Stark SLE Gen3 Mini LES 17

##### Mounting

- Direct mounting with 2 M3 self tapping screws
- Green indicator marks

##### Reflector ring Mounting

- This optional ring can be mounted on top of the Edison Opto EdiLex spot light module and provides in this way an easy plug-and-play attachment of various reflectors.
- Mounting with 3 self tapping screws M3 x 10mm
- Red indicator marks

#### Zhaga Book 11 Spot Light Modules

Zhaga Interface Specification Book 11 defines the interfaces of LED light engines (LLEs) comprising a circular, non-socketable LED module with a separate LED driver (electronic control gear).

The LED modules in Book 11 have an overall diameter of 35 mm and a height of 3.5 mm. Zhaga Book 11 LED modules are mounted by 2 M3 screws evenly located on diameter of 25mm on the LED cooler.

There are three LLE categories in Book 11, which are defined by the maximum diameter of the circular light-emitting surface (LES): 6.3 mm, 9.0 mm, 13.5 mm

Book 11 LLEs are suitable for spot-lighting and other applications that benefit from a small, circular source.



##### LED COB's for which Zhaga book 11 LED holders are available

- Bridgelux V10 / V13
- Citizen CitiLED CLL022, CLU024
- Cree XLamp CXA13xx, CXA15xx
- Edison Opto HM05, HM09
- Lextar Nimbus 1500
- Osram Soleriq P6, P9, P13, S13
- Prolight Opto PACB, PACE
- Seoul Semiconductor ZC6
- Sharp Mini Zenigata
- Tridonic Talexx Stark SLE Gen3 Mini LES 10

##### Mounting

- Direct mounting with 2 M3 self tapping screws
- Orange indicator marks

# MechaTronix in LED

## LPF6768-ZHP Pin Fin LED Cooler ø67mm



### Mounting Options


#### Bridgelux LED Arrays



Bridgelux is a leading provider of high power, cost effective and energy efficient light emitting diode (LED) solutions. Leveraging patented light source technology, Bridgelux LED Arrays replace traditional technologies (such as incandescent, halogen, fluorescent and high intensity discharge lighting) with integrated solid state light sources enabling high performance and energy-efficient products for the general lighting market.

#### Mounting indicator marks overview

MechaTronix recommends the use of a high thermal conductive interface between the LED module and the LED cooler. Either thermal grease, a thermal pad or a phase change thermal pad thickness 0.1-0.15mm is recommended. Thermal pads or phase change thermal pads can be pre-applied from MechaTronix.



#### Bridgelux Vero 13 / Vero 18 LED Array

##### Model names

- Vero 13 BXRC-27x2000
- Vero 13 BXRC-30x2000
- Vero 13 BXRC-35E2000
- Vero 13 BXRC-40x2000
- Vero 13 BXRC-50x2000
- Vero 18 BXRC-27x4000
- Vero 18 BXRC-30x4000
- Vero 18 BXRC-35E4000
- Vero 18 BXRC-40E4000
- Vero 18 BXRC-50C4000

##### Mounting

- Direct mounting with 2 screws M3 x 6mm
- Red indicator marks



#### Bridgelux Décor Vero 13 / Vero 18 LED Array

##### Model names

- BXRC-xxA2001-C-23
- BXRC-xxH2000-C-xx
- BXRC-xxA4001-F-23
- BXRC-xxH4000-F-xx
- BXRC-xxE4000-F-04
- BXRC-56G4000-F-04

##### Mounting

- Direct mounting with 2 screws M3 x 6mm
- Red indicator marks



#### Bridgelux V series V 10 / V 13 LED Array

##### Model names

- V10 BXRE-xxx1000-B-xx
- V13 BXRE-xxx2000-C-xx

##### Mounting

- With Zhaga Book 3 LED holder
- BJB spotlight connector 47.319.6214
- Mounting with 2 screws M3 x 10mm
- Orange indicator marks



# MechaTronix in LED

## LPF6768-ZHP Pin Fin LED Cooler ø67mm



### Mounting Options



#### Bridgelux V series V 15 / V 18 LED Array

##### Model names

- V15 BXRE-xxx3001-D-xx
- V18 BXRE-xxx4000-F-xx

##### Mounting

- With Zhaga Book 3 LED holder  
BJB spotlight connector 47.319.2224  
Mounting with 2 screws M3 x 10mm  
Green indicator marks



#### Bridgelux ES Rectangle LED Array

##### Model names

- BXRA-xxx0800
- BXRA-xxx1200
- BXRA-xxx2000
- BXRA-40E0950
- BXRA-40E1350
- BXRA-40E2200
- BXRA-xxC1100
- BXRA-xxC1600
- BXRA-xxC2600

##### Mounting

- With Zhaga Book 3 LED holder  
BJB spotlight connector 47.319.2040  
Mounting with 2 screws M3 x 10mm  
Green indicator marks



# MechaTronix in LED

## LPF6768-ZHP Pin Fin LED Cooler ø67mm



### Mounting Options



#### Citizen LED COB

**CITIZEN**  
Micro HumanTech

Citizen Electronics Co., Ltd. Is a precision electronics manufacturer with headquarters in Fujiyoshida City, Yamanash Japan. Prefecture and a subsidiary of Citizen Holdings Co., Ltd. Citizen Electronics is a leader in LED light sources for electronic devices and high power white LED lamps. The second generation CITELED CLL LED COB modules and the new upcoming generation CLU distinguish themselves through the combination of high lumen per watt performance combined with a perfect light quality control.

#### Mounting indicator marks overview

MechaTronix recommends the use of a high thermal conductive interface between the LED module and the LED cooler. Either thermal grease, a thermal pad or a phase change thermal pad thickness 0.1-0.15mm is recommended. Thermal pads or phase change thermal pads can be pre-applied from MechaTronix.

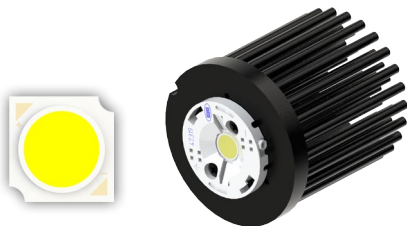

#### Citizen Cited LED CLL022 - CLU024

##### Model names

- CLL022-xxxx
- CLU024-xxxx

##### Mounting

- With Zhaga Book 11 LED holder
- BJB Spotlight connector 47.319.6060
- Ideal Industries Chip-Lok™ holder 50-2002CT
- Mounting with 2 screws M3 x 10mm
- Orange indicator marks



#### Citizen Cited LED CLL032 - CLU034

##### Model names

- CLL032-xxxx
- CLU034-xxxx

##### Mounting

- With Zhaga Book 3 LED holder
- BJB Spotlight connector 47.319.2021
- Ideal Industries Chip-Lok™ holder 50-2103CT
- TE Connectivity Lumawise type Z50 2213254-1
- TE Connectivity Lumawise type Z50 2213254-2
- Mounting with 2 screws M3 x 10mm
- Green indicator marks

# MechaTronix in LED

## LPF6768-ZHP Pin Fin LED Cooler ø67mm



### Mounting Options

#### Cree XLamp LED Array




Cree XLamp® LEDs deliver the industry's best lighting-class performance and are application-optimized to enable the lowest system cost.

Cree's new CXA LED Arrays deliver high lumen output and efficacy in a family of single, easy-to-use components. Optimized to simplify designs and lower system cost, Cree's CXA LED arrays are available in system level performance from 300 to over 16,000 lumens and can enable applications ranging from GU10s and commercial downlights to outdoor area lighting and high-bay lighting.

#### Mounting indicator marks overview

MechaTronix recommends the use of a high thermal conductive interface between the LED module and the LED cooler. Either thermal grease, a thermal pad or a phase change thermal pad thickness 0.1-0.15mm is recommended. Thermal pads or phase change thermal pads can be pre-applied from MechaTronix.



#### Cree XLamp CXA13 / CXB13 LED Array

##### Model names

- CXA1304-xxxx
- CXB1304-xxxx
- CXA1310-xxxx

##### Mounting

- With Zhaga Book 11 LED holder
- BJB Spotlight connector 47.319.6120
- Ideal Industries Chip-Lok™ holder 50-2000CR
- Mounting with 2 screws M3 x 10mm
- Orange indicator marks



#### Cree XLamp CXA15 / CXB15 LED Array

##### Model names

- CXA1507-xxxx
- CXB1507-xxxx
- CXA1512-xxxx
- CXB1512-xxxx
- CXA1520-xxxx

##### Mounting

- With Zhaga Book 11 LED holder
- BJB Spotlight connector 47.319.6101
- Ideal Industries Chip-Lok™ holder 50-2001CR
- Mounting with 2 screws M3 x 10mm
- Orange indicator marks




#### Cree XLamp CXA18/ CXB18 LED Array

##### Model names

- CXA1816-xxxx
- CXB1816-xxxx
- CXA1820-xxxx
- CXB1820-xxxx

##### Mounting

- With Zhaga Book 3 LED holder
- BJB Spotlight connector 47.319.2131
- Ideal Industries Chip-Lok™ holder 50-2101CR
- TE Connectivity Lumawise type Z50 2213401-1
- TE Connectivity Lumawise type Z50 2213401-2
- Mounting with 2 screws M3 x 10mm
- Green indicator marks





# MechaTronix in LED

## LPF6768-ZHP Pin Fin LED Cooler ø67mm



### Mounting Options


### Edison Opto LED Modules and COB's



Edison Opto with headquarters in Chung-Ho Dist, New Taipei City, Taiwan is a professional LED manufacture with specializes in designing and producing High-power LEDs, solid state lighting applications, LED sensors and SPDIFs. In response to rapid growth of capacity demand, Edison Opto has established factories in Dongguan and Yangzhou China and subsidiaries in USA and Germany. Edison Opto COB LED modules outstand in light quality and are available in the broadest lumen and CRI range available on the market.

#### Mounting indicator marks overview

MechaTronix recommends the use of a high thermal conductive interface between the LED module and the LED cooler. Either thermal grease, a thermal pad or a phase change thermal pad thickness 0.1-0.15mm is recommended. Thermal pads or phase change thermal pads can be pre-applied from MechaTronix.



#### Edison Opto Edipower II HM

##### Model names 9W

- 2PHM09xxxx

##### Mounting

- With Zhaga Book 11 LED holder
- Ideal Industries Chip-Lok™ holder 50-2002CT
- BJB Spotlight connector 47.319.6060
- Mounting with 2 screws M3 x 8mm
- Orange indicator marks

##### Model Names 16W-30W

- 2PHM16xxxx
- 2PHM30xxxx

##### Mounting

- With Zhaga Book 3 LED holder
- BJB Spotlight connector 47.319.2021
- Ideal Industries Chip-Lok™ holder 50-2103CT
- TE Connectivity Lumawise type Z50 2213254-1
- TE Connectivity Lumawise type Z50 2213254-2
- Mounting with 2 screws M3 x 8mm
- Green indicator marks

#### Edison Opto EdiLex Spot Light Module (SLM)

##### Model names

- 5PHR09xxxx
- 5PHR11xxxx
- 5PHR22xxxx

##### Mounting

- Direct mounting with 2 screws M3 x 8mm
- Green indicator marks

##### Reflector ring Mounting

- This optional ring can be mounted on top of the Edison Opto EdiLex spot light module and provides in this way an easy plug-and-play attachment of various reflectors.
- Mounting with 3 screws M3 x 10mm
- Red indicator marks

No.818, Dashun 2nd Rd., Sanmin Dist., Kaohsiung City 80787, Taiwan

sales@mechatronix-asia.com www.led-heatsink.com www.mechatronix-asia.com

Tel: +886-7-381-5892 Fax: +886-7-383-9293 VAT: 28600841



# MechaTronix in LED

## LPF6768-ZHP Pin Fin LED Cooler ø67mm



### Mounting Options


#### LG Innotek LED COB



LG Innotek is a global specialized material and component manufacturer who is making a better world through cutting edge core component technology that is leading the market and opening a smarter future through the development of new eco-friendly materials. With the world's highest production capacity as a single-factory and a solid LED business base built over more than a decade, LG Innotek's Paju LED factory produces 2 billion chips a month. Their LEMWM COB LED modules deliver a perfect lumen per watt ratio in an uncompromised lighting quality.

#### Mounting indicator marks overview

MechaTronix recommends the use of a high thermal conductive interface between the LED module and the LED cooler. Either thermal grease, a thermal pad or a phase change thermal pad thickness 0.1-0.15mm is recommended. Thermal pads or phase change thermal pads can be pre-applied from MechaTronix.



#### LG LEMWM18 10W / 13W / 17W / 24W COB

##### Model names

- LEMWM18580xxxx
- LEMWM18680xxxx
- LEMWM18780xxxx
- LEMWM18880xxxx

##### Mounting

- With Zhaga Book 3 LED holder  
BJB Spotlight connector 47.319.2080  
Ideal Industries Chip-Lok™ holder 50-2100LG  
Mounting with 2 screws M3 x 8mm  
Green indicator marks

#### Lumileds LED Array & COB





The Brighter Choice

Lumileds LUXEON COB is a new breakthrough in efficacy for arrays. Due to its industry leading small Light Emitting Surfaces (LES), the COB array is very easy work with and will enable easier and less expensive designs. All LUXEON COBs are available in a single 3-step as well as a single 5-step MacAdam Ellipse, ensuring uniform optical performance in the application. Ideal applications include down lights and directional lamps.

#### Mounting indicator marks overview

MechaTronix recommends the use of a high thermal conductive interface between the LED module and the LED cooler. Either thermal grease, a thermal pad or a phase change thermal pad thickness 0.1-0.15mm is recommended. Thermal pads or phase change thermal pads can be pre-applied from MechaTronix.



#### Luxeon COB 1203

##### Model names

- Luxeon COB LHC1-xxxx-1203

##### Mounting

- Direct mounting with 2 screws M3 x 6mm  
Orange indicator marks
- With Zhaga Book 3 LED holder  
Ideal Industries Chip-Lok™ holder 50-2100NC  
TE Connectivity Lumawise type Z50 2213382-1  
TE Connectivity Lumawise type Z50 2213382-2  
Mounting with 2 screws M3 x 8mm  
Green indicator marks




# MechaTronix in LED

## LPF6768-ZHP Pin Fin LED Cooler ø67mm



### Mounting Options

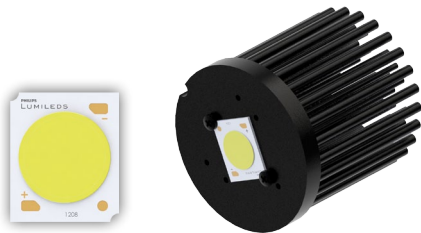

#### Luxeon COB 1204 - 1205 - 1208

##### Model names

- Luxeon COB LHC1-xxxx-1204
- Luxeon COB LHC1-xxxx-1205
- Luxeon COB LHC1-xxxx-1208

##### Mounting

- Direct mounting with 2 screws M3 x 6mm  
Red indicator marks
- With Zhaga Book 3 LED holder  
BJB spotlight connector 47.319.2011  
Ideal Industries Chip-Lok™ holder 50-2100SH  
TE Connectivity Lumawise type Z50 2213130-1  
TE Connectivity Lumawise type Z50 2213130-2  
Mounting with 2 screws M3 x 8mm  
Green indicator marks



#### Luxeon K arrays K12 - K16

##### Model names

- Luxeon K12 LXXx-Pxxx-xx12(A)
- Luxeon K16 LXXx-Pxxx-xx16(A)

##### Mounting

- With Zhaga Book 3 LED holder  
BJB spotlight connector 47.319.2070  
Mounting with 2 screws M3 x 10mm  
Green indicator marks

## Lustrous LED COB


### LUSTRIOUS

Green Technology of Lighting

LUSTRIOUS unique Chip-on-Board (COB) packaging technology of High Power LED leads the core competence of LUSTROUS. COB packaging technology shows excellent thermal management and high efficiency performance. One of the benefits of COB is bright, uniform light output. The excellent low thermal resistance is achieved through state of the art COB technology on highly conductive substrates. This enables low junction temperatures at chip level for much higher efficiencies.

#### Mounting indicator marks overview

MechaTronix recommends the use of a high thermal conductive interface between the LED module and the LED cooler. Either thermal grease, a thermal pad or a phase change thermal pad thickness 0.1-0.15mm is recommended. Thermal pads or phase change thermal pads can be pre-applied from MechaTronix.



#### Lustrous Lustron LL613F - LL620F LED COB

##### Model names

- Lustron LL613F1206-xxx
- Lustron LL620F1208-xxx

##### Mounting

- With Zhaga Book 3 LED holder  
BJB spotlight connector 47.319.2021  
Ideal Industries Chip-Lok™ holder 50-2103CT  
Mounting with 2 self tapping screws M3 x 8mm  
Green indicator marks



# MechaTronix in LED

## LPF6768-ZHP Pin Fin LED Cooler ø67mm



### Mounting Options


#### Osram PrevaLED LED Modules



With the PrevaLED Core and PrevaLED Core AC, Osram leads the path of versatile LED light modules interchangeable according Zhaga book 3 specifications. With an initial color binning below 3 steps Mc Adam, a wide range of lumen packages from 1.100lm all the way up to 5.000lm and a broad availability of color temperatures, the Osram PrevaLED Core found it's strive in high-end shop and down light applications with an uncompromised lighting quality.

#### Mounting indicator marks overview

MechaTronix recommends the use of a high thermal conductive interface between the LED module and the LED cooler. Either thermal grease, a thermal pad or a phase change thermal pad thickness 0.1-0.15mm is recommended. Thermal pads or phase change thermal pads can be pre-ap



#### Osram PrevaLED Core Z3

##### Model names

- PL-CORE-1100-xxx-Z3
- PL-CORE-2000-xxx-Z3
- PL-CORE-3000-xxx-Z3

##### Mounting

- Direct mounting with 2 screws M3 x 10mm
- Green indicator marks



#### Osram PrevaLED Core Z4

##### Model names

- PL-CORE-Z4-2000-xxx
- PL-CORE-Z4-3000-xxx

##### Mounting

- Direct mounting with 2 screws M3 x 10mm
- Green indicator marks



#### Osram PrevaLED Core AC

##### Model names

- PL-CORE-AC-800-xx
- PL-CORE-AC-2000-xx

##### Mounting

- Direct mounting with 2 screws M3 x 10mm
- Green indicator marks

# MechaTronix in LED

## LPF6768-ZHP Pin Fin LED Cooler ø67mm



### Mounting Options



#### Osram PrevaLED Core AC PRO

##### Model names

- PL-CORE-AC-PRO-2000-xxx
- PL-CORE-AC-PRO-3000-xxx

##### Mounting

- Direct mounting with 2 screws M3 x 10mm
- Green indicator marks

## Osram Opto Semiconductors LED COB



**OSRAM**

Opto Semiconductors

Osram SOLERIQ® LEDs are designed to meet the requirements of professional indoor general lighting applications. Large flux output, small light emitting surfaces, variation, CRI greater than 80 and easy to use Chip-on-Board technology support easy and creative lighting design. These properties make SOLERIQ® LED COB modules a high efficient, high-quality and price-performance-optimized solution for all demanding and at the same time cost-conscious lighting manufactures and designers.

#### Mounting indicator marks overview

MechaTronix recommends the use of a high thermal conductive interface between the LED module and the LED cooler. Either thermal grease, a thermal pad or a phase change thermal pad thickness 0.1-0.15mm is recommended. Thermal pads or phase change thermal pads can be pre-applied from MechaTronix.

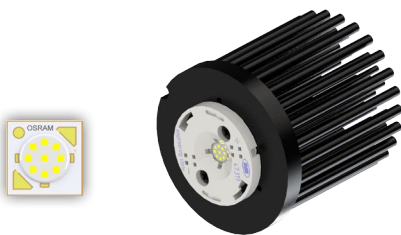

#### Osram Soleriq P6 LED COB

##### Model names

- GW MAEB1.EM
- GW MAEB1.CM

##### Mounting

- With Zhaga Book 11 LED holder
- BJB Spotlight connector 47.319.6190
- Mounting with 2 screws M3 x 8mm
- Orange indicator marks



#### Osram Soleriq P9 LED COB

##### Model names

- GW MAFB1.EM
- GW MAFB1.CM

##### Mounting

- With Zhaga Book 11 LED holder
- BJB Spotlight connector 47.319.6200
- Mounting with 2 screws M3 x 8mm
- Orange indicator marks

# MechaTronix in LED

## LPF6768-ZHP Pin Fin LED Cooler ø67mm



### Mounting Options



#### Osram Soleriq S13 LED COB

##### Model names

- GW-KAGHB1.xxxx

##### Mounting

- With Zhaga Book 3 LED holder  
Ideal Industries Chip-Lok™ holder 50-2101CR  
TE Connectivity Lumawise type Z50 2213401-1  
TE Connectivity Lumawise type Z50 2213401-2  
Mounting with 2 screws M3 x 8mm  
Green indicator marks
- With Zhaga Book 11 LED holder  
BJB Spotlight connector 47.319.6111  
Mounting with 2 screws M3 x 8mm  
Orange indicator marks




#### Osram Soleriq S19 LED COB

##### Model names

- GW-KAHLB1.xxxx

##### Mounting

- With Zhaga Book 3 LED holder  
BJB spotlight connector 47.319.2170  
TE Connectivity Lumawise type Z50 2213407-1  
TE Connectivity Lumawise type Z50 2213407-2  
Mounting with 2 screws M3 x 8mm  
Green indicator marks



#### Osram Soleriq E30 LED COB

##### Model names

- GW KAJRB2.EM-STTQ-xxxx
- GW KAJRB2.EM-TPTR-xxxx

##### Mounting

- Direct mounting with 2 screws M3 x 6mm  
Green indicator marks
- With Zhaga Book 3 LED holder  
BJB Spotlight connector 47.319.2090  
Mounting with 2 screws M3 x 8mm  
Green indicator marks



# MechaTronix in LED

## LPF6768-ZHP Pin Fin LED Cooler ø67mm



### Mounting Options


#### Philips LED Modules

## PHILIPS

The third Philips Fortimo LED SLM generation is the ideal solution for spot lighting fixtures and highly efficient compact down light luminaires. It is specifically designed for the retail market showcasing retail merchandise in bright and vivid light. This generation is equipped with new Chip-On-Board (COB) LED technology. This technology enables the creation of the most efficient point source Philips LED system available.

#### Mounting indicator marks overview

MechaTronix recommends the use of a high thermal conductive interface between the LED module and the LED cooler. Either thermal grease, a thermal pad or a phase change thermal pad thickness 0.1-0.15mm is recommended. Thermal pads or phase change thermal pads can be pre-applied from MechaTronix.



#### Philips Fortimo SLM Gen3 / Gen4 LED Modules

##### Model names

- Fortimo LED SLM 2000 G3
- Fortimo LED SLM 3000 G3
- Fortimo LED SLM 1100 G4
- Fortimo LED SLM 2000 G4
- Fortimo LED SLM 3000 G4

##### Mounting

- Direct mounting with 2 screws M3 x 6mm
- Green indicator marks


#### Prolight Opto LED COB



Founded in October 2004, Prolight Opto Technology Corporation is a professional manufacturer of LED packaging, dedicated to the research, development, and manufacturing of mid-to-high-power, high reliability LED packages. Prolight Opto continually invests over 6% of sales revenue in R&D and patents. With own package patents from the US and Taiwan they insure a wide range of LED emitters in the smallest foot prints and COB LED modules with perfect thermal management and high density lumen output.

#### Mounting indicator marks overview

MechaTronix recommends the use of a high thermal conductive interface between the LED module and the LED cooler. Either thermal grease, a thermal pad or a phase change thermal pad thickness 0.1-0.15mm is recommended. Thermal pads or phase change thermal pads can be pre-applied from MechaTronix.



#### Prolight Opto BI series PABA COB

##### Model names

- PABA-10Fxx-xxxx
- PABA-15Fxx-xxxx
- PABA-22xxx-xxxx
- PABA-26xxx-xxxx
- PABA-35xxx-xxxx

##### Mounting

- With Zhaga Book 3 LED holder
- BJB spotlight connector 47.319.2040
- Mounting with 2 screws M3 x 6mm
- Green indicator marks

# MechaTronix in LED

## LPF6768-ZHP Pin Fin LED Cooler ø67mm



### Mounting Options



#### Prolight Opto CE series PACE COB

##### Model names

- PACE-7xxx-xxxx
- PACE-14xxx-xxxx
- PACE-21xxx-xxxx
- PACE-28xxx-xxxx

##### Mounting

- With Zhaga Book 11 LED holder
- BJB Spotlight connector 47.319.6060
- Mounting with 2 screws M3 x 6mm
- Orange indicator marks




#### Prolight Opto CII series PACC COB

##### Model names

- PACC-18xxx-xxxx

##### Mounting

- With Zhaga Book 3 LED holder
- BJB Spotlight connector 47.319.2021
- TE Connectivity Lumawise type Z50 2213254-1
- TE Connectivity Lumawise type Z50 2213254-2
- Mounting with 2 screws M3 x 6mm
- Green indicator marks

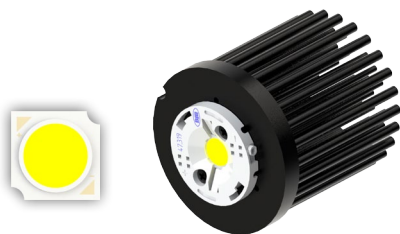

#### Prolight Opto CI series PACB COB

##### Model names

- PACB-5xxx-xxxx
- PACB-7xxx-xxxx
- PACB-9xxx-xxxx

##### Mounting

- With Zhaga Book 11 LED holder
- BJB Spotlight connector 47.319.6060
- Mounting with 2 screws M3 x 6mm
- Orange indicator marks



#### Prolight Opto CII series PACC COB

##### Model names

- PACC-18xxx-xxxx

##### Mounting

- With Zhaga Book 3 LED holder
- BJB Spotlight connector 47.319.2021
- TE Connectivity Lumawise type Z50 2213254-1
- TE Connectivity Lumawise type Z50 2213254-2
- Mounting with 2 screws M3 x 6mm
- Green indicator marks



# MechaTronix in LED

## LPF6768-ZHP Pin Fin LED Cooler ø67mm



### Mounting Options

#### Seoul Semiconductor LED COB




##### SEOUL SEMICONDUCTOR

The new Seoul Semiconductor ZC series Chip-On-Board (COB) LED Arrays offer high lumen density and efficacies of up to 140lm/W in a single, easy-to-use LED component family. Available in all major color temperatures from 2700K up to 6000K, these high flux packages deliver system level performance of 700 lumens to over 6,000 lumens. The new ZC series family is available in a single 3-step MacAdam Ellipse binning, ensuring excellent color consistency with minimum CRI options of 70, and 80 combining high quality of light with high efficacy.

##### Mounting indicator marks overview

MechaTronix recommends the use of a high thermal conductive interface between the LED module and the LED cooler. Either thermal grease, a thermal pad or a phase change thermal pad thickness 0.1-0.15mm is recommended. Thermal pads or phase change thermal pads can be pre-applied from MechaTronix.



#### Seoul Semiconductor ZC 6 LED COB

##### Model names

- SDW01F1C
- SDW81F1C
- SDW91F1C

##### Mounting

- With Zhaga Book 11 LED holder
- BJB Spotlight connector 47.319.6060
- Ideal Industries Chip-Lok™ holder 50-2002CT
- Mounting with 2 screws M3 x 8mm
- Orange indicator marks



#### Seoul Semiconductor ZC 12 / ZC 18 LED COB

##### Model names

- SDW02F1C
- SDW82F1C
- SDW92F1C
- SDW03F1C
- SDW83F1C
- SDW93F1C

##### Mounting

- With Zhaga Book 3 LED holder
- BJB Spotlight connector 47.319.2021
- Ideal Industries Chip-Lok™ holder 50-2103CT
- TE Connectivity Lumawise type Z50 2213254-1
- TE Connectivity Lumawise type Z50 2213254-2
- Mounting with 2 screws M3 x 8mm
- Green indicator marks



#### Seoul Semiconductor ZC 25 / ZC 40 LED COB

##### Model names

- SDW04F1C
- SDW84F1C
- SDW94F1C
- SDW05F1C
- SDW85F1C
- SDW95F1C

##### Mounting

- With Zhaga Book 3 LED holder
- BJB Spotlight connector 47.319.2030
- Ideal Industries Chip-Lok™ holder 50-2204CT
- Mounting with 2 screws M3 x 8mm
- Green indicator marks



# MechaTronix in LED

## LPF6768-ZHP Pin Fin LED Cooler ø67mm



### Mounting Options


#### Sharp LED Modules & COB

## SHARP

Sharp Zenigata Chip on Board (COB) technology leverages 40 years of LED expertise to help your products outshine the competition with some of the highest brightness-per-watt in the industry. Sharp's new Mega Zenigata 50W – 80W modules take traditional, high-power lighting applications head on with power-saving LED alternatives. Sharp Devices Europe has launched an important new portfolio of LED modules dubbed INTERMO. The Standard INTERMO is a Zhaga Book 3 form-factor module, which ensures compatibility with a large eco-system of third-party products.

#### Mounting indicator marks overview

MechaTronix recommends the use of a high thermal conductive interface between the LED module and the LED cooler. Either thermal grease, a thermal pad or a phase change thermal pad thickness 0.1-0.15mm is recommended. Thermal pads or phase change thermal pads can be pre-applied from MechaTronix.



#### Sharp INTERMO Standard / Slim LED Modules

##### Model names

- GW7MMCxxGZC - 3000 lm
- GW7MGDxxGZC - 3000 lm
- GW7MMDxxGZC - 4000 lm
- GW7MGExxGZC - 4000 lm

##### Mounting

- Direct mounting with 2 screws M3 x 6mm
- Green indicator marks



#### Sharp Mega Zenigata 15-25W/25-40W/35-50W LED COB

##### Model names

- GW5DxAxxM04
- GW6DxAxxNFC
- GW5DxCxxM04
- GW6DxCxxNFC
- GW6DxDxxNFC

##### Mounting

- With Zhaga Book 3 LED holder
- BJB spotlight connector 47.319.2011
- Ideal Industries Chip-Lok™ holder 50-2100SH
- Mounting with 2 screws M3 x 6mm
- Green indicator marks



# MechaTronix in LED

## LPF6768-ZHP Pin Fin LED Cooler ø67mm



### Mounting Options



#### Sharp Tiger Zenigata 25W LED COB

##### Model names

- GW6TGCBG40C

##### Mounting

- With Zhaga Book 3 LED holder  
BJB spotlight connector 47.319.2051  
Mounting with 2 screws M3 x 6mm  
Green indicator marks



#### Sharp Mini Zenigata 4-10W/10-15W/15-24W LED COB

##### Model names

- GW5BQCxxK03
- GW5BQFxxK03
- GW5BMFxxK04
- GW5BTJxxK03
- GW5BMCxxKG4
- GW6BxGxxHED
- GW5BMJxxK04
- GW6BxExxHED
- GW6BxWxxHED
- GW5BMRxxK05
- GW6BxRxxHED
- GW6BxSxxHED

##### Mounting

- With Zhaga Book 11 LED holder  
BJB spotlight connector 47.319.6180  
Ideal Industries Chip-Lok™ holder 50-2000P  
Mounting with 2 screws M3 x 6mm  
Orange indicator marks

# MechaTronix in LED

## LPF6768-ZHP Pin Fin LED Cooler ø67mm



### Mounting Options


#### Tridonic LED Modules and COB



With the TALEXX LED products Tridonic gives you the confidence that your chosen lighting solution will give you precisely the results you want. Thanks to Tridonic's many years of experience in product development they have been able to raise the quality of light from their LEDs to new levels. The production series have an exceptionally constant light color so they guarantee a uniform and crystal clear color appearance. In addition to high efficiency and balanced distribution of light Tridonic offers you impressive robustness in the latest generation of their products and the resultant long life will save you maintenance and repair costs.

#### Mounting indicator marks overview

MechaTronix recommends the use of a high thermal conductive interface between the LED module and the LED cooler. Either thermal grease, a thermal pad or a phase change thermal pad thickness 0.1-0.15mm is recommended. Thermal pads or phase change thermal pads can be pre-applied from MechaTronix.



#### Tridonic Talexx Stark SLE GEN3 SELECT / CLASSIC / FOOD / ART

##### Model names

- STARK-SLE-G3-19-xxx
- STARK-SLE-G3-23-xxx

##### Mounting

- Direct mounting with 2 screws M3 x 8mm
- Green indicator marks



#### Tridonic Talexx Stark SLE GEN3 Mini LES-17 SELECT / CLASSIC / ART

##### Model names

- STARK-SLE-PURE-G3-17-xxx

##### Mounting

- With Zhaga Book 11 LED holder
- BJB Spotlight connector 47.319.2021
- Mounting with 2 screws M3 x 8mm
- Green indicator marks



#### Tridonic Talexx Stark SLE GEN4 ADVANCE / EXCITE

##### Model names

- STARK-SLE-G4-19mm-3000lm-xxx
- STARK-SLE-G4-23mm-5000lm-xxx

##### Mounting

- Direct mounting with 2 self tapping screws M3 x 8mm
- Green indicator marks



# MechaTronix in LED

## LPF6768-ZHP Pin Fin LED Cooler ø67mm



### Mounting Options


#### Vossloh Schwabe LED Modules



Vossloh-Schwabe is an independent brand within the Panasonic Group responsible for the global development of the business area "Components for light technology". Panasonic employs 367,000 members of staff with an annual turnover of 76.75 billion Euros (8692.7 billion yen) and is represented throughout the world by more than 634 companies or representations in Asia, America and Europe. The Vossloh Schwabe Luga Shop LED modules are ideal solution for high-end luminaire designs where quality stands at the first place.

#### Mounting indicator marks overview

MechaTronix recommends the use of a high thermal conductive interface between the LED module and the LED cooler. Either thermal grease, a thermal pad or a phase change thermal pad thickness 0.1-0.15mm is recommended. Thermal pads or phase change thermal pads can be pre-applied from MechaTronix.



#### Luga Shop 2014 LED modules

##### Model names

- WU-M-484 / WU-M-461
- WU-M-485 / WU-M-462
- WU-M-486 / WU-M-464

##### Mounting

- Direct mounting with 2 screws M3 x 10mm
- Green indicator marks



#### Luga Shop 2014 Kit LED COB

##### Model names

- DMS088
- DMS128
- DMS158

##### Mounting

- With Luga Shop Kit holder
- Mounting with 2 screws M3 x 6mm
- Green indicator marks






# MechaTronix in LED

## LPF6768-ZHP Pin Fin LED Cooler ø67mm



### Drawings & Dimensions

Example: LPF6768-ZHP

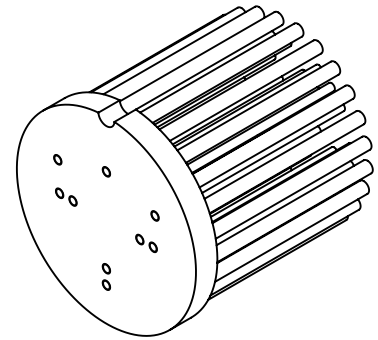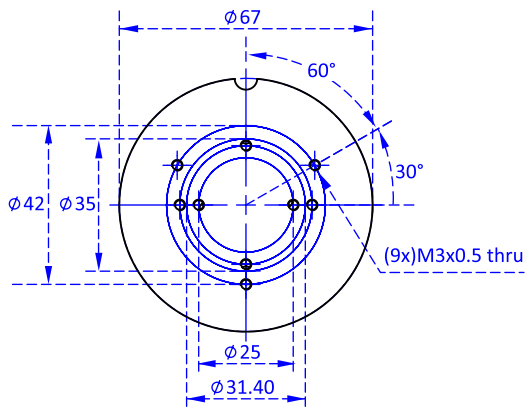


### Thermal Data

$Pd = Pe \times (1-\eta L)$			LED Light efficiency, $\eta L$ (%)			Heat sink to ambient thermal resistance $R_{hs-amb}$ (°C/W)	Heat sink to ambient temperature rise $T_{hs-amb}$ (°C)
			17%	20%	25%	LPF6768-ZHP	LPF6768-ZHP
Dissipated Power $Pd(W)$	3	Electrical Power $Pe(W)$	3.61	3.75	4.0	3.0	9
	5		6.02	6.25	6.67	2.8	14
	10		12.04	12.5	13.33	2.5	25
	15		18.07	18.75	20.0	2.3	35
	20		24.10	25.0	26.67	2.2	44
	25		30.12	31.25	33.33	2.1	53

Heat sink to ambient temperature rise  $T_{hs-amb}$  (°C)

LPF6768-ZHP

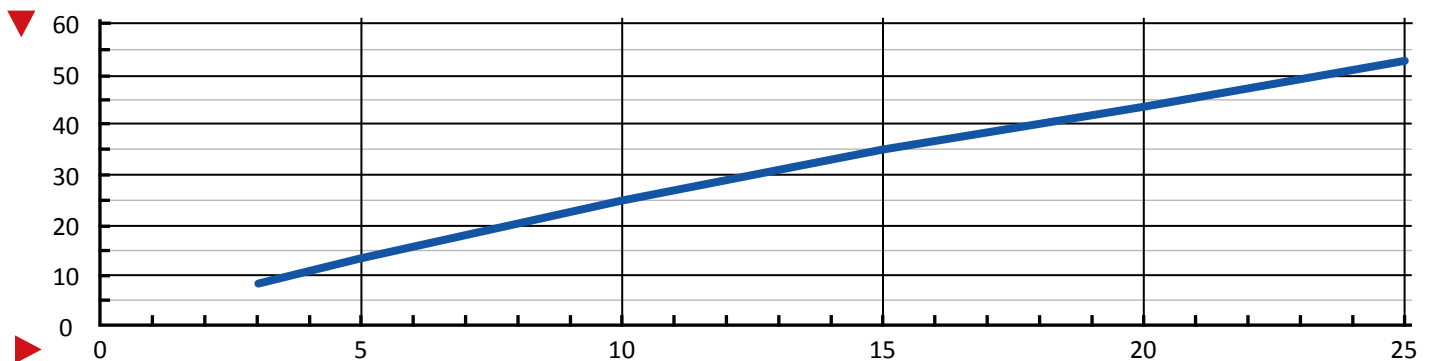

Dissipated Power  $P_d$ (W)