


MechaTronix in LED

LSB7050-BRI-ESR Bridgelux LED ES Square Array Heat Sink ø70mm



Features & Benefits

- Designed for Bridgelux LED ES Square Array
- Diameter 70mm base – height 50mm
- Thermal resistance Rth 5.0°C/W
- Required Rth according Bridgelux datasheets at Tamb 40°C
- BXRA-XX1200/1350/1600:3.68°C/W (Tc105°)
- Specific mounting pattern 2xM2.5 + cable guidance hole

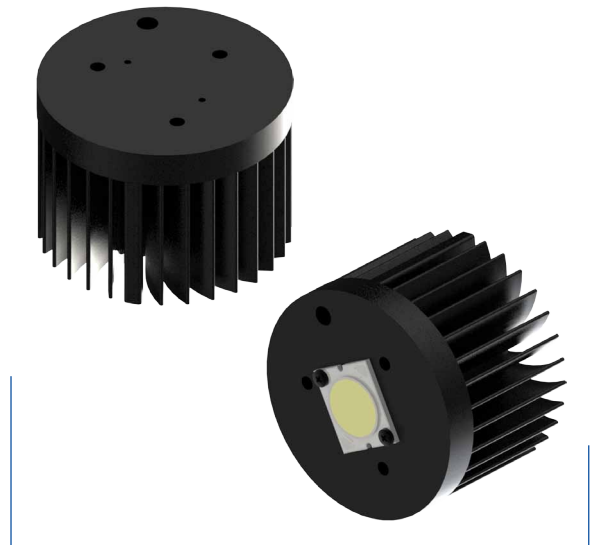

Order Information



Example : LSB7050-BRI-ESR-B-1

LSB7050-BRI-ESR - **1** - **2**

- 1** Anodising color
"B" - Black Anodised
"C" - Clear Anodised
"Z" - Custom (specify)
- 2** Mounting Options - see graphics for details
Combinations available
Ex. order code - 13
means option 1 and 3 combined

MOUNTING OPTION	THREAD	THREAD DEPTH
NONE/BLANC	NONE	NONE
1	M8 x 1	5mm MIN.
2	#5/16-24 UNC	0.197" MIN.
3	M70 x 2	Base contour

MechaTronix in LED

LSB7050-BRI-ESR Bridgelux LED ES Square Array Heat Sink $\phi 70\text{mm}$





Product Details

	Total Height ^{mm}	Rth(°C/W)	Volume ^{mm³}	Cooling Surface ^{mm²}	Weight ^{gr}
LSB7050-BRI-ESR	50.00	5.0	94427.53	68947.15	254.19

Mounting Options


Notes:

1. MechaTronix reserves the right to change products or specifications without prior notice.
2. Mentioned models are an extraction of the full product range. For specific mechanical adaptations please contact MechaTronix.
3. All these types are made by forging process from highly conductive aluminum type AL6063 T5 with a typical Thermal Conductivity of 209W/m-K.

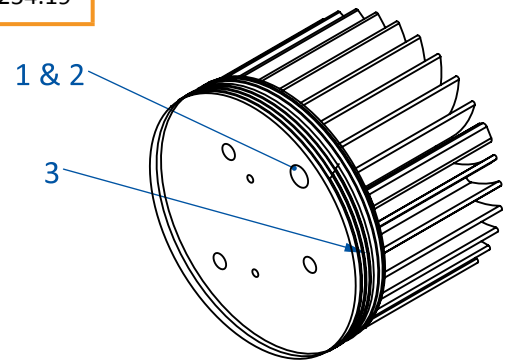


1 Mechanical version
Cable hole tapping

M8x1
Depth: 5mm



2 Mechanical version
Hole tapping

5/16-24 UNC
Depth: 0.197"






3 Mechanical version
M50x2

Screw thread around
base contour

Drawings & Dimensions

Example : LSB7050-BRI-ESR

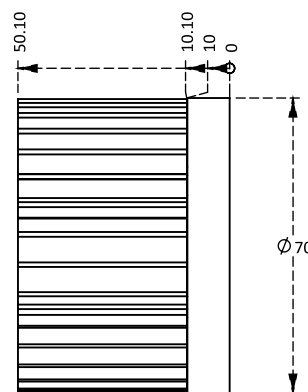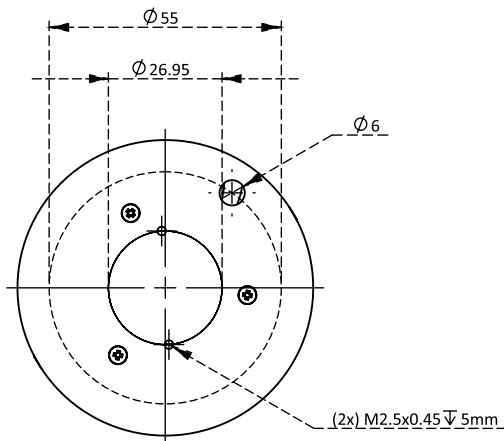

MechaTronix in LED

LSB7050-BRI-ESR Bridgelux LED ES Square Array Heat Sink $\phi 70\text{mm}$



Thermal Data


Heat sink base to ambient thermal resistance, R_{hs-amb} [K/W]

Power (W) LSB7050-BRI-ESR

5	5.6
7	5.3
10	5.0
Rth Av.	5.0

Heat sink to ambient temperature difference [$^{\circ}\text{C}$]

— LSB7050-BRI-ESR

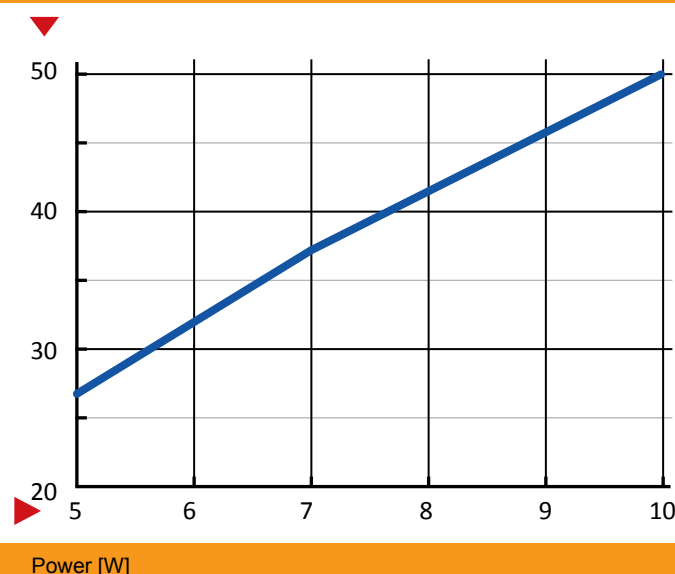


Spreading resistance, R_{sp} [K/W]

Base thickness		t=2mm	t=3mm	t=5mm	t=10mm
Ratio of light engine (LE) area over heat sink base area, ALE/Ahs [%]	1%	0.87	0.61	0.41	0.30
	3%	0.68	0.47	0.30	0.20
	5%	0.54	0.37	0.24	0.15
	8%	0.44	0.30	0.19	0.12
	11%	0.36	0.24	0.15	0.09
	20%	0.24	0.17	0.10	0.06
	32%	0.16	0.11	0.07	0.04
	62%	0.06	0.04	0.03	0.01

Heat sink base spreading resistance, R_{sp} [K/W], based on base thickness, t

Spreading resistance, R_{sp} [K/W]

— t=2mm — t=3mm — t=5mm — t=10mm

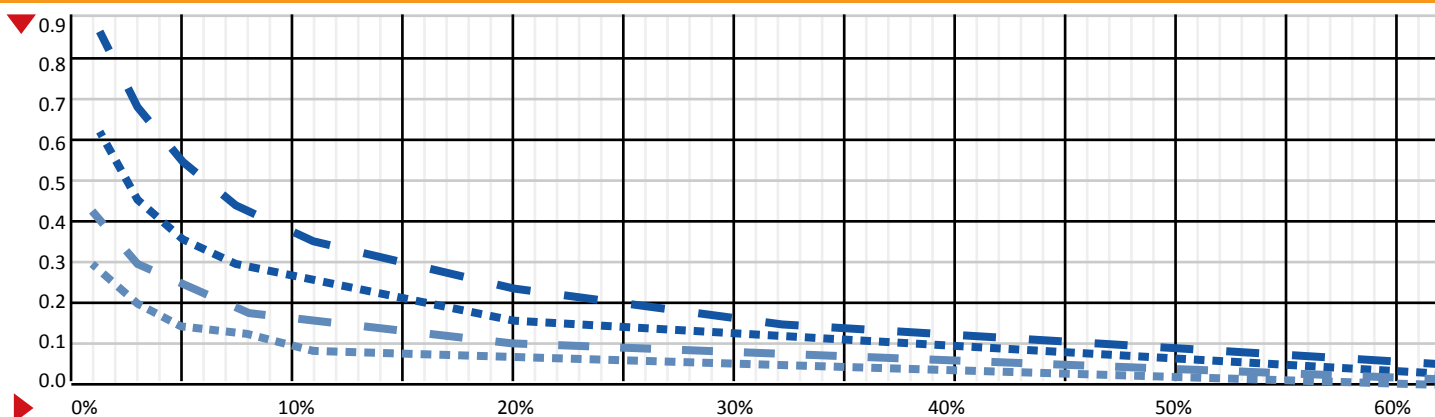

Ratio of light engine (LE) area over heat sink base area, ALE/Ahs [%]